

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 989 509 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
29.03.2000 Bulletin 2000/13

(51) Int Cl.7: G06K 11/12

(21) Application number: 99307539.9

(22) Date of filing: 23.09.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **Electrotextiles Company Limited**
London WC1B 3ST (GB)

(72) Inventor: **Sandbach, David Lee**
London N7 8A7 (GB)

(30) Priority: 26.09.1998 GB 9820902
26.09.1998 GB 9820905
26.09.1998 GB 9820906
26.09.1998 GB 9820908
26.09.1998 GB 9820909
26.09.1998 GB 9820910

(74) Representative: **Atkinson, Ralph et al**
Atkinson Burrington Ltd.,
The Technology Park,
Shirland Lane
Sheffield S9 3PA (GB)

(54) Position detector constructed from fabric

(57) A position detector is constructed from fabric having electrically conductive elements. The detector has at least two electrically conducting planes. An electric potential is applied across one of the planes to de-

termine the position of a mechanical interaction. In addition, a second electrical property is determined to identify additional properties of the mechanical interactions.

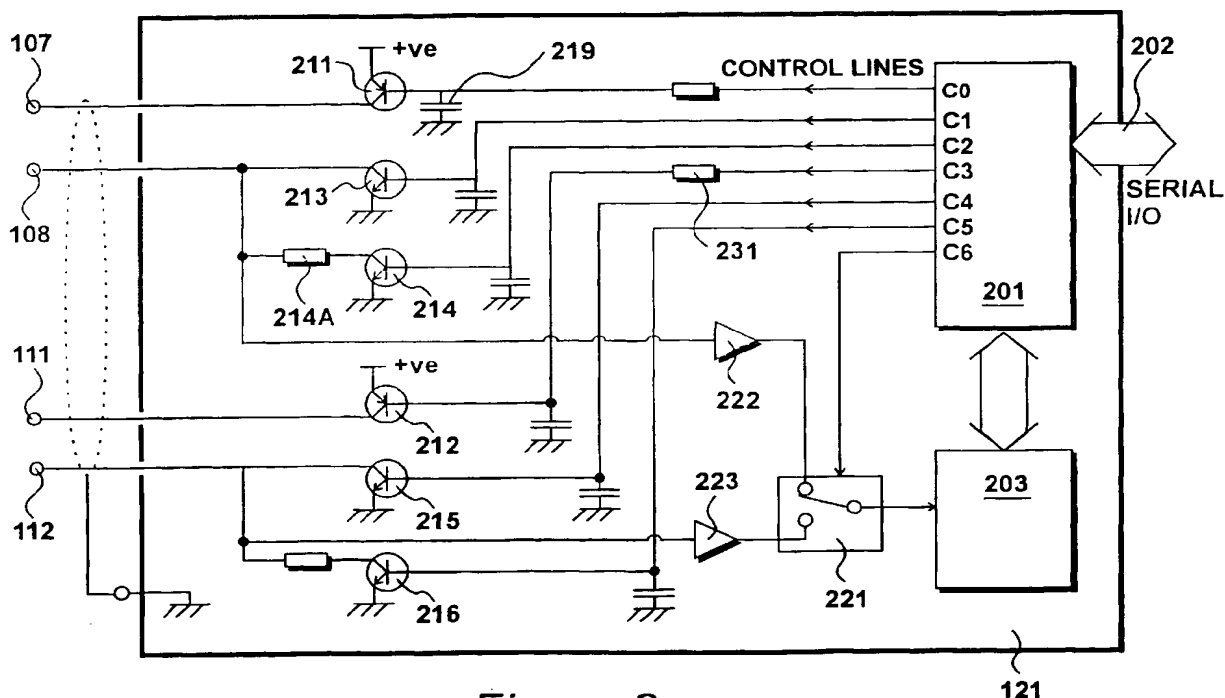


Figure 2

Description

[0001] The present invention relates to a detector constructed from fabric having electrically conductive elements to define at least two electrically conductive planes.

[0002] A fabric touch sensor for providing positional information is described in United States patent 4,659,873 of Gibson. The sensor is fabricated using at least one resistive fabric layer in the form of conducting threads. This fabric is constructed using either uni-directional threads or crossed threads formed by overlaying one set with another or weaving the two sets together. The fabric is separated from a second resistive layer to prevent unintentional contact by separators in the form of non-conducting threads, insulator dots or with an air gap. Both resistive layers are fabrics formed from conductive threads such that no pre-forming is required in order to adapt the sensor to a contoured object.

[0003] A problem with the sensor described in the aforesaid United States patent is that it is only capable of identifying the location of the mechanical interaction and cannot provide additional information about the interaction.

[0004] A touch sensor for providing positional information is described in United States patent 4,487,885 of Talmage, which also provides a signal dependent upon the pressure or force applied. However, the sensor described is made from a printed circuit board and a flexible sheet of rubber, elastomer or plastic and as such it does not have the many physical qualities that a fabric may provide.

[0005] According to a first aspect of the present invention, there is provided a position detector constructed from fabric having electrically conductive elements, comprising at least two electrically conducting planes, wherein an electric potential is applied across at least one of said planes to determine the position of a mechanical interaction; and a second electrical property is determined to identify additional properties of said mechanical interaction.

[0006] In a preferred embodiment, the position detector is configured to measure current or resistance as said second electrical property. Furthermore, applied force, applied pressure, area of contact or orientation of an object may be determined as the additional property of mechanical interactions.

[0007] In a preferred embodiment, the detector interacts mechanically with parts of a human body; a first electrical property determines the position of a mechanical interaction and a second electrical property determines the area of coverage.

[0008] According to a second aspect of the present invention, there is provided a method of detection, performed with respect to a detector constructed from fabric and having electrically conductive elements configured to provide at least two electrically conducting planes, comprising the steps of applying a potential across at

least one of said planes to determine the position of a mechanical interaction, and measuring a second electrical property to identify additional properties of said mechanical interactions.

[0009] According to a third aspect of the present invention, there is provided a detector constructed from fabric having electrically conductive elements and configured to produce electrical outputs in response to mechanical interactions, wherein said detector is divided into a plurality of regions; each of said regions includes a first conducting plane and a second conducting plane; a mechanical interaction results in conducting planes of at least one of said regions being brought closer together; and a potential is applied across at least one of said planes to determine the position of said mechanical interaction.

[0010] According to a fourth aspect of the present invention, there is provided a detector constructed from fabric having electrically conductive elements to define at least two electrically conducting planes and configured to produce an electrical output in response to a mechanical interaction, wherein a potential is applied across at least one of said planes to determine the position of a mechanical interaction and said second electrical property is determined to identify additional properties of said mechanical interactions; and a conductivity non-uniformity is included in at least one of said planes so as to modify an electrical response to a mechanical interaction.

[0011] In a preferred embodiment, the conductivity non-uniformity includes a co-operating pair of conducting strips configured to generate a substantially linear electric field within the conducting planes. Preferably, the strips are applied to each of the conducting planes at orthogonal locations.

[0012] According to an alternative preferred embodiment, all edges of the conducting planes are modified. The conductivity non-uniformity may be defined by adjusting the density of conducting threads or it may be created by printing conductive materials onto the detector.

[0013] The invention will now be described by way of example only, with reference to the accompanying drawings, of which:

Figure 1 shows a position detector constructed from fabric;

Figure 2 shows a control circuit identified in *Figure 1*;

Figure 3 details operations performed by the microcontroller identified in *Figure 2*;

Figure 4 details planes identified in *Figure 1*;

Figure 5 details current flow due to mechanical interaction;

Figure 6 details an alternative construction for conducting fabric planes;

Figure 7 shows an alternative configuration of conducting planes;

Figure 8 shows an alternative configuration of conducting planes;

Figure 9 details a composite configuration of conducting planes; and

Figure 10 shows an asymmetric object interacting with conducting planes.

Figure 11A and *Figure 11B* show an alternative construction for a detector;

Figure 12A and *Figure 12B* show a further alternative construction;

Figure 13 shows a further alternative construction;

Figure 14 shows a further alternative construction.

Figure 15 shows an alternative embodiment having a plurality of detectors;

Figure 16 shows an alternative detector configuration; and

Figure 17 shows multiple detectors of the type shown in *Figure 16*.

Figure 18 shows a first embodiment in which a connector has been included during the machining process; and

Figure 19 shows an alternative embodiment in which a connector has been added during a machining process.

Figure 20 shows a detector constructed from fabric having a conductivity non-uniformity; and

Figure 21 shows an alternative embodiment with a conductivity non-uniformity.

[0014] The invention will now be described by way of example only with reference to the previously identified drawings.

[0015] A position detector **101** constructed from fabric is shown in *Figure 1*. The detector has two electrically conducting fabric planes, in the form of a first plane **102** and a second plane **103**. The planes are separated from each other and thereby electrically insulated from each other, by means of an insulating mesh **104**. When force is applied to one of the planes, the two conducting planes are brought together, through the mesh **104**, thereby creating a position at which electrical current may conduct between planes **102** and **103**. In this way, it is possible to identify the occurrence and/or position of a mechanical interaction.

[0016] The fabric planes are defined by fabric structures, which may be considered as a woven, non-woven (felted) or knitted etc. The fabric layers may be manufactured separately and then combined to form the detector or the composite may be created as part of the mechanical construction process.

[0017] When a voltage is applied across terminals **107** and **108**, a voltage gradient appears over plane **102**. When a mechanical interaction takes place, plane **103** is brought into electrical contact with plane **102** and the actual voltage applied to plane **103** will depend upon the position of the interaction. Similarly when a voltage is applied between connectors **111** and **112**, a voltage gradient will appear across plane **103** and mechanical in-

teraction will result in a voltage being applied to plane **102**. Similarly, the actual voltage applied to plane **102** will depend upon the actual position of the interaction. In this way, for a particular mechanical interaction, it is possible to identify locations within the plane with reference to the two aforesaid measurements. Thus, connectors **107**, **108**, **111** and **112** are received by a control circuit **121**, configured to apply voltage potentials to the detector **101** and to make measurements of electrical properties in response to mechanical interactions.

[0018] Control circuit **121** identifies electrical characteristics of the sensor **101** and in response to these calculations, data relating to the characteristics of the environment are supplied to a data processing system, such as a portable computer **131**, via a conventional serial interface **132**.

[0019] Control circuit **121** is detailed in *Figure 2*. The control circuit includes a micro-controller **201** such as a Philips 80C51 running at a clock frequency of twenty megahertz. Operations performed by micro-controller **201** are effected in response to internally stored commands held by an internal two kilobyte read-only memory. The micro-controller also includes one hundred and twenty-eight bytes of randomly accessible memory to facilitate intermediate storage while performing calculations. Micro-controller **201** includes a serial interface **202** in addition to assignable pins and an interface for communicating with an analogue to digital converter **203**, arranged to convert input voltages into digital signals processable by the micro-controller **201**.

[0020] The control circuit **121** includes two PNP transistors **211** and **212**, in addition to four NPN transistors **213**, **214**, **215** and **216**. All of the transistors are of relatively general purpose construction and control switching operations within the control circuit so as to control the application of voltages to the position detector **101**.

[0021] In operation, measurements are made while a voltage is applied across first plane **102** and then additional measurements are made while a voltage is applied across the second plane **103**; and output voltage only being applied to one of the planes at any particular time. When an output voltage is applied to one of the planes, plane **102** or plane **103**, input signals are received from the co-operating plane **103** or **102** respectively. Input signals are received by the analogue to digital converter **203** via a selection switch **221**, implemented as a CMOS switch, in response to a control signal received from pin C6 of the micro-controller **201**. Thus, in its orientation shown in *Figure 2*, switch **221** has been placed in a condition to receive an output from a first high impedance buffer **222**, buffering an input signal received from plane **102**. Similarly, when switch **221** is placed in its alternative condition, an input is received from a second high impedance buffer **223**, configured to receive an input signal from plane **103**. By placing buffers **222** and **223** on the input side of CMOS switch **221**, the switch is isolated from high voltage electrostatic discharges which may be generated in many conditions

where the detector undergoes mechanical interactions.

[0022] In the condition shown in *Figure 2*, switch **221** is placed in its upper condition, receiving input signals from buffer **222**, with output signals being supplied to the second plane **103**. Further operation will be described with respect to this mode of operation and it should be appreciated that the roles of the transistor circuitry are reversed when switch **221** is placed in its alternative condition. As previously stated, condition selection is determined by an output signal from pin C6 of micro-controller **201**. In its present condition the output from pin C6 is low and switch **221** is placed in its alternative configuration when the output from pin **6** is high.

[0023] Output pin C0 controls the conductivity of transistor **211** with pins C1 to C5 having similar conductivity control upon transistors **213**, **214**, **212**, **215** and **216** respectively.

[0024] Transistors **211** and **213** are switched on when a voltage is being applied to the first plane **102** and are switched off when a voltage is being applied to the second plane **103**. Similarly, when a voltage is being applied to the second plane **103**, transistors **212** and **215** are switched on with transistors **211** and **213** being switched off. In the configuration shown in *Figure 2*, with switch **221** receiving an input from buffer **222**, output transistors **211** and **213** are switched off with output transistors **212** and **215** being switched on. This is achieved by output pin C0 being placed in a high condition and pin C1 being placed in a low condition. Similarly, pin C3 is placed in a low condition and pin C4 is placed in a high condition.

[0025] In the configuration shown, C3 is placed in a low condition, as previously described. The micro-controller **201** includes a pull-down transistor arranged to sink current from the base of transistor **212**, resulting in transistor **212** being switched on to saturation. Consequently, transistor **212** appears as having a very low resistance, thereby placing terminal **111** at the supply voltage of five volts. Resistor **231** (4K7) limits the flow of current out of the micro-controller **201**, thereby preventing burn-out of the micro-controller's output transistor.

[0026] Pin C4 is placed in a high state, resulting in transistor **215** being placed in a conducting condition. A serial resistor is not required given that the micro-controller **201** includes internal pull-up resistors, as distinct from a pull-up transistor, such that current flow is restricted. Thus, transistors **212** and **215** are both rendered conductive, resulting in terminal **111** being placed at the positive supply rail voltage and terminal **112** being placed at ground voltage. The capacitors shown in the circuit, such as capacitor **219**, limit the rate of transistor transitions thereby reducing rf transmissions from the sensor **101**.

[0027] With transistors **212** and **215** placed in their conductive condition, input signals are received from the first plane **102** in the form of a voltage applied to terminal **108**. For position detection, this voltage is measured directly and transistor **214** is placed in a non-conductive

condition by output pin C2 being placed in a low condition. Under these conditions, the voltage from input terminal **108** is applied to analogue to digital converter **203** via buffer **222** and switch **221**.

[0028] In accordance with the present invention, a second electrical property is determined which, in this embodiment, represents the current flowing through the sensor in response to a mechanical interaction. The current measurement is made by placing transistor **214** in a conductive condition, by placing output pin C2 in a high condition. In this condition, current received at terminal **108** is supplied to transistor **214** via resistor **214A**, having a resistance of typically 5k selectable so as to correspond to the characteristics of the sensor. A voltage is supplied to A to D converter **203** via buffer **222** and switch **221** but on this occasion the voltage represents a voltage drop, and hence a current, across resistor **214A**.

[0029] Thus, transistors **212** and **215** are placed in a conducting condition, transistor **214** is placed in a non-conducting condition, so as to measure voltage, and is then placed in a conducting condition so as to measure current. The roles of the transistors are then reversed, such that output transistors **211** and **213** are placed in a conducting condition, with transistors **212** and **215** being placed in a non-conducting condition (and switch **221** reversed) allowing a voltage to be measured by placing transistor **216** in a non-conducting condition, and then allowing a current to be measured by placing transistor **216** in a conducting condition.

[0030] The cycling of line conditions, in order to make the measurements identified previously, is controlled by a clock resident within micro-controller **201**. After each condition has been set up, a twelve bit number is received from the digital to analogue converter **203** and this number is retained within a respective register within micro-controller **201**. Thus, after completing a cycle of four measurements, four twelve bit values are stored within the micro-controller **201** for interrogation by the processing device **131**. Furthermore, the rate of cycling may be controlled in response to instructions received from the processing device **131**.

[0031] Operations performed by micro-controller **201** are detailed in *Figure 3*. The micro-controller continually cycles between its four configuration states and each time a new input is produced, representing a current or a voltage in one of the two configurations, new output data is calculated on an on-going basis. Thus, output registers are updated such that the best data is made available if the micro-controller is interrupted by the external processor **131**.

[0032] The micro-controller **201** is fully interrupt driven in terms of receiving external interrupts for data interrogation along with internal interrupts in order to initiate a configuration cycle. The external interrupt has a higher priority such that external processor **131** is provided with information as soon as possible in response to making an interrupt request.

[0033] Internally interrupts for the micro-controller 201 are generated by its own internal timer and the procedure shown in *Figure 3* is effectively held in a wait state until a next timer interrupt is received at step 301. The wait state allows voltage levels on connections 107, 108, 111 and 112 to become stable and provides sufficient time for valid data to be received from the analogue to digital converter 203.

[0034] At step 302, an output is received from analogue to digital converter 203 and at step 303 calculations are performed with respect to the most current data received from the analogue to digital converter, so as to convert numerical values relating to voltages and currents into numerical values representing properties of the mechanical interaction. Thus, after performing calculations at step 303, appropriate registers are updated at step 304 and it is these registers that are interrogated in response to an interrupt received from processing system 131.

[0035] At step 305 next conditions for the output lines are set by appropriate logic levels being established for output pins C0 to C6. After the next output condition has been selected, the processor enters a wait state at step 306, allowing the electrical characteristics to settle, whereafter processing continues in response to the next timer interrupt.

[0036] Thus, it should be appreciated that on each iteration of the procedure shown in *Figure 3*, one of the output conditions is selected at step 305. Thus, it should be appreciated that the input data is effectively delayed and does not represent a condition of the electrical characteristics at an instant. If in practice, the delay between measurements becomes too large, it becomes necessary to enhance the frequency of operation of circuits within the control system shown in *Figure 2*. Thus, the rate of conversion for converter 203 would need to be increased and the circuitry would need to be redesigned for high frequency operation. This in turn could create problems in terms of high frequency interference resulting in enhanced shielding being required for the facility as a whole.

[0037] When output condition number one is selected, an output voltage at 108 is determined. On the next cycle, identified as output condition number two, the current flowing through connector 108 is determined. On the next iteration, under output configuration number three, the voltage appearing at connector 112 is determined and on the next cycle, identified as condition number four, the current flowing through connector 112 is determined. After each of these individual measurements, new data is generated in response to steps 303 and 304 such that resulting output registers are being regularly updated on a continual basis, such that the processing system 131 may effectively perform a continual monitoring operation in terms of changes made to the mechanical interactions with the detector 101.

[0038] In a typical implementation, the four characteristic measurements, making up a complete cycle, will

be repeated at a frequency of between twenty-five to fifty times per second. In situations where such a repetition rate is not required, it may be preferable to increase the duration of the wait states and thereby significantly reduce overall power consumption.

[0039] Planes 102, 103 and 104 of the detector 101 are detailed in *Figure 4*. Planes 101 and 103 are of substantially similar construction and are constructed from fabric having electrically conductive elements 402 in plane 102 along with similar electrical conductive elements 403 in plane 103. Thus, it is possible for a voltage indicative of position to be determined when conductive elements 402 are placed in physical contact with conductive elements 403.

[0040] The overall resistivity of planes 402 and 403 are controlled by the inclusion of non-conducting elements 404 and 405. Thus, resistivity is controlled by controlling the relative quantities and/or densities of conductive elements 402 with non-conductive elements 404. Resistivity may also be controlled by selecting an appropriate fibre type, adjusting the thickness of the fibre or adjusting the number of strands present in a yarn.

[0041] Plane 104 represents a non-conducting insulating spacer positioned between the two conducting planes 102 and 103. Plane 104 is constructed as a moulded or woven nylon sheet having an array of substantially hexagonal holes 411, the size of holes 411 is chosen so as to control the ease with which it is possible to bring conductive elements 402 into physical contact with conductive elements 403. Thus, if relatively small holes 411 are chosen, a greater force is required in order to bring the conductive elements together. Similarly, if the size of the hole is increased, less force is required in order to achieve the conductive effect. Thus, the size of holes 411 would be chosen so as to provide optimal operating conditions for a particular application. Operating conditions may also be adjusted by controlling the thickness of layer 104, its surface flexibility and the contour of co-operating planes 102 and 103.

[0042] When a potential is applied across one of the conducting planes, the actual potential detected at a point on that plane will be related to the position at which the measurement is made. Thus, a direct voltage measurement from the co-operating plane gives a value from which a positional co-ordinate may be determined. By reversing the plurality of the planes and taking a measurement from the opposing plane, two co-ordinates are obtained from which it is then possible to identify a precise location over the planar surface.

[0043] In addition to measuring position on the planar surface, the present invention is directed at identifying additional electrical properties in order to determine properties of the mechanical interaction. As previously described, the system is configured to measure currents in addition to measuring voltages.

[0044] When the two conducting planes are brought into mechanical contact, due to a mechanical interaction, the amount of current flowing as a result of this con-

tact will vary in dependence upon the actual position of the plane where the mechanical interaction takes place. The position of the mechanical interaction has also been determined with reference to voltages and it could be expected that these two quantities will vary in a substantially similar way, each representing the same physical situation. Experience has shown that variations in measured current do not follow exactly the same characteristic as variations in measured voltage. As illustrated in *Figure 5*, the amount of current flowing due to a mechanical interaction will depend upon the position of a mechanical interaction 501. However, in addition to this, the amount of current flow will also depend upon the size of the mechanical interaction. As the size of the mechanical interaction increases, there is a greater area of contact and as such the overall resistance of the mechanical interaction is reduced. However, it should be appreciated that variations in terms of current with respect to interaction size is a sophisticated relationship, given that, in addition to the resistivity of the contact area 501, the resistivity of the actual electrical connections within the sheet must also be taken into account.

[0045] Thus, current is transmitted through a region 502 in order to provide a current to the contact region 501. Some aspects of this effect will be compensated with reference to position calculations and other variations due to this effect may be compensated by a non-linear analysis of the input data.

[0046] Contact area resistivity is illustrated generally at 510 and shows that the amount of current flowing between plane 102 and plane 103 is considered as being related to the area of mechanical interaction, which is related to the area of contact externally and to the level of externally applied mechanical force.

[0047] The resulting non-linear relationship between the force area product and the resulting current flow is illustrated generally at 520. At 521 there is an initial threshold point, identifying the point at which the gap starts to be closed, followed by an operational part of the curve 522 which may give useful indications of pressure up to point 523, whereafter the relationship becomes very non-linear until position 524 where the relationship effectively saturates.

[0048] Using a detector of the type illustrated in *Figure 7*, it is possible to measure current flow, which could also be considered as contact resistance, in order to identify an additional mechanical property of the interaction. As illustrated in *Figure 5*, this other mechanical property is related to the area of contact between the sheets, determined by the amount of force applied to the sheets, and to the total area over which the force is applied; or a combination of these two properties. Thus, data relating to force and area may give useful information relating to the interaction, separate from the position at which the interaction takes place.

[0049] In some situations, such as when using a stylus or similar implement, the area of applied force remains substantially constant therefore a measurement

of current will enable calculations to be made in terms of stylus pressure. Pressure sensitive styli are known but in known configurations the pressure detection is determined within the stylus itself, leading to the stylus being mechanically connected to operational equipment or requiring sophisticated wireless transmission within the stylus itself. The present embodiment allows stylus pressure to be determined using any non-sophisticated stylus, given that the pressure detection is made by the co-operating fabric detector, arranged to detect stylus position (with reference to voltage) in combination with stylus pressure, with reference to current.

[0050] An alternative construction for the conducting fabric planes is illustrated in *Figure 6*. The detector includes a first conducting plane 601 and a second conducting plane 602. In addition, woven into each of the conducting planes 601 and 602, there are a plurality of non-conducting nodes 605 arranged to mutually interfere and thereby separate the two conducting planes. Between the nodes, the fabrics of the first and second planes may be brought into contact relatively easily such that the application of force, illustrated by arrow 611 would tend to cause a finite number of regions interspersed between nodes 605 to be brought into contact.

Thus, for a particular region, contact either is taking place or is not taking place as illustrated by curve 621.

[0051] With a number of such regions brought into contact, the overall level of current flow will tend to vary with the area of contact as illustrated by curve 631.

Thus, using a construction of the type shown in *Figure 6*, it is possible to obtain a more linear relationship, compared to that shown in *Figure 5*, in which the level of current flow gives a very good indication of the area of coverage as distinct from the level of force applied to the mechanical interaction.

[0052] Given a construction of the type shown in *Figure 6*, an indication of applied force or pressure may be obtained, in addition to an accurate determination of area, by providing an incremental switching operation. In the configuration shown in *Figure 7*, there is provided a first conducting plane 701 which interacts with a second conducting plane 702. Furthermore, conducting plane 702 interacts with a third conducting plane 704. Conducting plane 701 is separated from conducting plane 702 by non-conducting portions 705. Similarly, plane 702 is separated from plane 704 by non-conducting portions 706. More non-conducting portions 706 are provided than similar non-conducting portions 705. Consequently, less force is required to produce electrical contact between planes 701 and 702 than is required to produce an electrical contact between planes 702 and 704. In this way, it is possible to provide an incremental measurement of force, given that a low force will only cause contact between plane 701 and plane 702 whereas a larger force will also provide electrical contact between plane 702 and 704.

[0053] An alternative configuration is shown in *Figure 8* in which it is possible to obtain enhanced substantially

continuous variations in current flow with respect to applied force. A first conducting plane **801** interacts with a second conducting plane **802**. The planes are woven in such a way as to produce very uneven surfaces such that, under light load, the level of interaction is relatively low. As load increases, as illustrated generally at **805**, a greater level of surface contact shown at **806** is created thereby increasing the level of current flow in a substantially continuous way. It should also be noted that this configuration does not include an insulating layer as such and that a level of current flow will always take place even under conditions of zero load. Alternatively, a very thin insulating layer could be provided, having a relatively low threshold, thereby resulting in a zero current flow when no load is applied.

[0054] As shown by curve **811**, the output current varies with respect to variations in applied force for a constant load area. Similarly, as shown by curve **821**, output current varies with respect to load area for a substantially constant applied force.

[0055] A composite configuration is shown in *Figure 9*, in which a detector **901**, substantially similar to that shown in *Figure 6*, is combined with a detector **902**, substantially similar to that shown in *Figure 9*. Detector **901** provides an accurate measurement of applied area and it is relatively unaffected by applied force. Detector **902**, as shown in *Figure 8*, provides an output which varies with respect to area and force. Thus, by processing the output of these two detectors in combination, it is possible to compensate the output from detector **902** in order to produce values representing force, such that the two currents provide indications of both force and area.

[0056] The operation of the control circuit **121** is such as to apply a first voltage across diagonals **107** and **108** with a similar voltage being applied across diagonals **111** and **112**. The nature of the voltage distribution is therefore asymmetric, but this does not result in difficulties provided that the area of contact between the two planes is relatively symmetric. However, should an asymmetric area of contact be made, as illustrated in *Figure 10*, differences will occur in terms of current measurements when considering calculations made in the two directions.

[0057] An asymmetric object **1001** is shown applied to the surface of a detector **1002**. When a voltage is applied between contact **107** and **108**, paths over which current may flow, illustrated generally at **1003** are relatively large and the object is perceived as having a large area or is perceived as applying a large force. In the opposite dimension, when a voltage is applied between **111** and **112**, the regions over which current flow takes place illustrated generally at **1005**, become relatively smaller therefore the object would be perceived as having a relatively smaller area or would be perceived as providing a relatively smaller force.

[0058] If the system is programmed to the effect that the object has a constant area and applies a constant force, these differences in terms of current flow may be

processed in order to give an indication as to the orientation of the object. Thus, the system of the type illustrated in *Figure 10*, is used in combination with the detector of the type illustrated in *Figure 9* it is possible to make reference to the parameters of location in two-dimensions, force or pressure, the area of application and orientation.

[0059] In the preferred embodiment, electrical characteristics of voltage and current are measured. Alternatively, it would be possible to determine the resistance or the resistivity of the conducting sheets. Problems may be encountered when using alternating currents due to energy being radiated from the conducting sheets. However, in some situations it may be preferable to use alternating currents, in which further electrical characteristics of the detector may be considered, such as capacitance, inductance and reactance etc.

[0060] The detector shown in *Figure 1*, constructed from conducting planes **102** and **103**, operates satisfactorily if the plane of the detector is maintained substantially flat. This does not create a problem in many applications where relatively flat operation is considered desirable. However, although constructed from fabric, thereby facilitating bending and folding operations, the reliability of the detector in terms of its electrical characteristics cannot be guaranteed if the detector planes are folded or distorted beyond modest operational conditions.

[0061] A detector is shown in *Figure 11*, constructed from fabric having electrically conductive elements to define at least two electrically conductive planes. The detector is configured to produce an electrical output in response to a mechanical interaction, as illustrated in *Figure 1*. At least one of the planes includes first portions and second portions in which the first portions have a higher resistance than said second portions and the first higher resistance portions are more flexible than the second portions. In this way, flexing occurs at the portions of high resistance, where contact between the planes has little effect, while the lower resistance portions, where contact does have a strong electrical effect, remain substantially rigid such that the flexing of the material does not occur over these portions of the detector.

[0062] Portions **1101** have a relatively high resistance compared to portions **1102**. Portions **1101** are not involved in terms of creating an electrical reaction in response to a mechanical interaction. The electrical responses are provided by the more rigid weave of portions **1102**. The purpose of portions **1101** is detailed in *Figure 11B*. A curvature has been applied to the detector but the configuration is such that normal operation is still possible. The flexing has occurred predominantly at portions **1101**. However, portions **1102** have remained straight thereby ensuring that they remain displaced from each other, even when a curvature is present, such that the detector is still available for detecting the presence of a mechanical interaction.

[0063] The rigidity of portions **1102** may be enhanced

as shown in *Figure 12A*. A first plane **1201** has rigid portions **1202** and flexible portions **1203**. A second plane **1204** has relatively rigid portions **1205** and relatively flexible portions **1206**. The relatively flexible portions **1206** physically contact against similar portions **1203** in the first plane **1201**. In order to ensure that there is no, or at least minimal electrical interaction at these points of contacts, the electrical resistance of the flexible portions **1203** and **1206** is relatively high. A partially insulating layer may be provided between the conducting layers, as shown in *Figure 1*. However, the flexible portions **1203** act as insulating separators therefore in this embodiment the provision of a separation layer is not essential. Furthermore, the rigidity of the interacting sections, in terms of the rigid portions **1202** and **1205**, has its rigidity further enhanced by the presence of relatively solid intermediate plates **1208**.

[0064] Flexing of the construction shown in *Figure 12A* is substantially similar to that provided by the embodiment shown in *Figure 11B*. The flexing of the embodiment shown in *Figure 12A* is detailed in *Figure 12B*. Flexing occurs at the position of the relatively flexible portions **1203** and **1206**. The rigidity of portions **1202** and **1205** is enhanced by the provision of more solid plates **1208**. Thus, the embodiment shown in *Figures 12A* and *12B* may have more strenuous flexing forces applied thereto such that mechanical interaction detection is maintained even under severe operating conditions

[0065] The provision of the flexible portions effectively provide lines over the surface of the conducting planes where folding is permitted. Thus, complex curvatures may be obtained by a number of folds being effected at a plurality of these preferred foldable lines, thereby allowing complex shapes to be attained while maintaining the desired electrical characteristics.

[0066] An alternative embodiment is shown in *Figure 13* in which a first co-operating plane has flexible high resistive portions **1301** and rigid conducting portions **1302**. This plane co-operates with a second plane **1303** of substantially homogenous construction. Thus, sufficient flexing and insulation is provided by the non-conducting flexible portions **1301** of the lower co-operating plane **1304**. The rigidity of conducting portions **1302** may be enhanced in a fashion substantially similar to that provided by *Figure 12A* as illustrated in *Figure 14*. The device includes an outer plane **1401** of substantially homogenous conducting construction. Below this, there is provided a second co-operating plane **1402** and the two planes may be separated by an insulating layer not shown in the example. The second plane or layer includes flexible non-conducting portions **1403** and more rigid conducting portions **1404**, substantially similar to those shown in *Figure 13*. In addition, rigid plates **1405** are provided below each rigid portion **1404** thereby significantly enhancing the rigidity of these portions. Thus, the construction in *Figure 14* is capable of withstanding more aggressive working environments compared to

the lighter construction shown in *Figure 13*. In the construction shown in *Figures 13* and *14* the outer layers, **1303** and **1401** respectively, are fabricated in a substantially elastic fashion, thereby providing for a stretching or extension of this layer during flexing operations.

[0067] The detector shown in *Figure 1* is capable of accurately detecting the position of a mechanical interaction and as previously described, it is also possible to determine other characteristics of the mechanical interaction by modifying other electrical properties. A problem with the detector shown in *Figure 1* is that it experiences difficulties if more than one unconnected mechanical interaction takes place. If a first mechanical interaction were to take place and, simultaneously, a second mechanical interaction were to take place, displaced from the first, it would not be possible, using the configuration shown in *Figure 1*, to identify the presence of two mechanical interactions. A condition would be detected to the effect that a mechanical interaction is taking place but the system would tend to perceive this as a single mechanical interaction having characteristics substantially similar to the average of the characteristics of the two independent interactions.

[0068] An alternative embodiment for overcoming problems of this type is shown in *Figure 15*. In *Figure 15*, a plurality of detectors **1501**, **1502**, **1503**, **1504**, **1505**, **1506** and **1507** have been connected together and each of these individual detectors has its own unique connectors **1511**, **1512**, **1513** and **1514**. In this way, each of the individual detectors may be connected to its own respective control circuit, such as circuit **121** shown in *Figure 1* or, in an alternative embodiment, a single control circuit of the type shown in *Figure 1* may be shared, using a switching arrangement, between all seven of the individual combined detectors. In this way, each individual detector, such as detector **1501**, provides the same level of accuracy as the detector shown in *Figure 1*. However, if two or more mechanical interactions take place on different detector sections, it is possible to detect this condition and provide appropriate output responses. However, it is only possible to detect a plurality of mechanical interactions if these interactions take place on different sections and it is not possible for the embodiment shown in *Figure 15* to detect a plurality of interactions if these interactions take place on the same section.

[0069] In the arrangement shown in *Figure 15*, the detectors have been arranged in strips such that there is enhanced definition in the direction of arrow **1521** but the definition in the direction of arrow **1522** has not changed.

[0070] In the detector shown in *Figure 1*, position detection is made possible using four electrical connection cables, a first two connected to opposing diagonal corners of the upper sheet and a further two connected to the alternative opposing diagonal corners of the lower sheet. An alternative configuration is shown in *Figure 16* in which electrical connectors **1601**, **1602**, **1603** and

1604 are connected to respective corners **1611**, **1612**, **1613** and **1614** of a lower plane conducting sheet **1621**. An upper plane conducting sheet **1622** is connected to a single detecting cable **1631** connected at a position **1632** towards an edge of upper conducting sheet **1622**. A disadvantage of the configuration shown in *Figure 16* is that five separate electrical connections are required whereas only four electrical connections are required in the configuration shown in *Figure 1*. However, in some circumstances, the configuration shown in *Figure 16* does have advantages over that shown in *Figure 1*.

[0071] The configuration shown in *Figure 16* may be used to effectively multiplex the operation of a detector so as to facilitate the detection of a plurality of mechanical interactions to a greater extent than the configuration shown in *Figure 15*. In particular, it facilitates detecting multiple mechanical interactions in both dimensions of the planar detector.

[0072] As shown in *Figure 17*, a lower planar sheet **1701** has connections **1702**, **1703**, **1704** and **1705** at each of its corners. Thus, sheet **1701** operates in a way which is substantially similar to the operation of sheet **1621** and all output voltages are generated within this sheet, either across diagonal **1702** to **1704** or across diagonal **1703** to **1705**, thereby giving a two-dimensional co-ordinate within the area of the sheet.

[0073] An upper planar sheet **1721** is divided into a plurality of portions. In the example shown, eight portions **1731** to **1738** are provided. Thus, the mechanical action results in conducting planes of at least one of said regions being brought into electrical interaction with the lower plane **1701**. Furthermore, if a mechanical interaction occurs at region **1731** and a second mechanical interaction occurs at region **1735** (for example) both of these mechanical interactions may be determined independently and an output to this effect may be generated by a processing system, such as system **131**.

[0074] In order to achieve the space division multiplexing provided by regions **1731** to **1738**, time division multiplexing of the electrical signals is performed in which, during each individual time slot, one individual region **1731** to **1738** is considered. This is achieved by each individual region **1731** to **1738** having its own respective electrical connector **1741** to **1748**. These connectors are preferably incorporated in to the structure of the sheet.

[0075] Control circuitry for the configuration shown in *Figure 17* requires modification compared to that shown in *Figure 2*. In particular, each of the eight output control lines **1741** is supplied to its own respective buffering amplifier, similar to amplifiers **2223** and **2223** and the output from each of these eight amplifiers is applied to appropriate switching devices, allowing one of eight inputs to be selected using a plurality of switches substantially similar to switch **2221**.

[0076] A complete scanning cycle consists of applying a voltage between input terminals **1702** and **1704**. An output is then considered from each individual output

terminals **1741** to **1748**. The voltages are then reversed such that a voltage is applied between output terminals **1705** and **1703**. Each of the individual input terminals is then considered again so as to provide two-dimensional co-ordinates within each of the individual regions **1731** to **1748**. As described with respect to *Figure 2*, both voltages and currents may be considered in order to provide additional mechanically related information, such as pressure related information etc.

[0077] In the detector configuration shown in *Figure 1* and in alternative detector configurations, such as that shown in *Figure 15* and that shown in *Figure 16*, it is necessary to provide electrical connection between processing equipment and the detector fabric itself. Techniques for the addition of electrical connectors to current conveying fabrics are known. However, in the known techniques, continual wear and usage of the detector assembly often results in electrical connectors becoming disconnected from the material fabric, resulting in total system failure. It is therefore highly desirable to provide a system in which the electrical connector is held very securely to the material fabric itself so as to provide a robust system which does not become disconnected through continual use.

[0078] An improved approach to providing electrical connection to the electric current carrying conductors within the fabric is illustrated in *Figure 18*. Further modification is shown in *Figure 19*. In both of these systems, the fabric is constructed from electrically conducting fibres and from electrically insulating fibres by a mechanical process, such as weaving or knitting. An improved electrical connection is achieved by connecting electrical connection devices to the electrically conducting fibres of the fabric forming the detector during the mechanical fabric generating process. Thus, in the embodiments shown in *Figure 18* and *Figure 19*, there is no requirement for adding connectors after a fabric has been created. The provision of a connector to the electric current carrying fibres is achieved during the actual mechanical process itself. Thus, for example, if the fibres are being produced by a knitting operation, part of this knitting operation involves procedures by which the electrical current carrying connector is actually included as part of the overall knit.

[0079] Fibres **1801** making up the weave are illustrated in *Figure 18*. A weaving procedure may be considered as generating woven fabric by traversing in the direction of arrow **1802**. At pre-programmed positions, or at manually selected positions, modifications are made to the weaving process to the effect that a connector **1803** is to be introduced.

[0080] In the example shown in *Figure 18*, connector **1803** is an insulation displacement connector (IDC) allowing an insulated wire to be connected in such a way that it is not necessary to remove the insulation from the wire, given that the insulation is effectively cut as the wire, illustrated by reference **1804** is inserted into the connector in the direction of arrow **1805**.

[0081] The weaving procedure is modified such that connector **1803** is included as part of the weave and is thereby held relatively firmly after the weaving procedure has been completed. In order to provide a further enhanced mechanical connection between electrical connector **1803** and the remaining woven fabric, additional layers of electrically conducting epoxy resin **1805** and **1806** are applied, such that, in operation, physical force applied to connector **1803** will not, under normal circumstances, be displaced from the woven material of the device and will maintain electrical integrity.

[0082] A similar configuration is shown in *Figure 19* in which a rivet fastener **1901** is applied during a weaving or knitting process, thereby substantially embedding the rivet fastener within the overall weave or knit. After the rivet fastener has been secured by the woven fabric **1902**, electrically conducting epoxy resin **1903** is applied to provide enhanced mechanical and electrical stability.

[0083] In the configuration shown in *Figure 1* and in the configuration shown in *Figure 16*, an electrical field is established over the transmitting plane. Given a plane of infinite size, the electrical field would have a regular geometric distribution and the position of a mechanical interaction could be determined from two voltage measurements in a substantially straightforward way. However, in the configuration shown in *Figure 1* and *Figure 16*, edges are present and these edges introduce severe distortions to the nature of the electric field from which measurements are being taken. In the control circuit **121** and within the data processing system **131** it is possible to provide a level of compensation, possibly in response to empirical measurements but such an approach has disadvantages, one of which being a loss of resolution.

[0084] Systems are shown in *Figures 20* and *21* in which a detector is constructed from fabric having electrically conductive elements to define at least two electrically conducting planes. The detector is configured to produce an electrical output in response to a mechanical interaction. The relationship between mechanical interaction and electrical output is enhanced by introducing a conductivity non-uniformity which is included in at least one of the planes so as to modify an electrical response to the mechanical interaction.

[0085] In *Figure 20*, an electrical connector **2001** is connected to a plane at a first corner and a second connector **2002** is connected to the diagonally opposing corner. A configuration of this type could be used for a detector of the type shown in *Figure 1*, in which the electrical field effectively traverses across the diagonal corners, resulting in distortions at the edges. In the embodiment shown in *Figure 20*, a conducting thread **2003** with relatively low resistivity is included across edge **2004**, electrically connected to connector **2001**. Similarly, a second conducting thread **2005**, with relatively low resistivity, extends from electrical connection **2002** along edge **2006**. In this way, the whole of edge **2004** becomes conducting and the whole of edge **2006** becomes con-

ducting. The resulting electric field is then substantially linear throughout the length of the detector thereby substantially eliminating non-linear edge effects.

[0086] In its co-operating plane **2010** a low resistance conducting thread **2011** is included along edge **2012** and a similar conducting thread is provided along the opposing edge. In this way, the electric field traverses in a direction which is orthogonal to the electric field provided in the upper sheet, thereby allowing co-ordinates defined in mutually orthogonal co-ordinate space.

[0087] A conducting material is shown in *Figure 21* in which areas **2101**, close to all four edges, have had their conductivity modified, such that the overall conductivity of the sheet is non-uniform. This modification to conductivity may be achieved in several ways, including the addition of a conducting thread of the type illustrated in *Figure 20*. Alternatively, the modification to conductivity, to provide conductivity non-uniformity, may be achieved by a printing operation in which electrically conducting inks, possibly including silicon, are printed at region **2101**. Alternatively, the density of conducting fibres in the woven material itself may be modified towards the edges of the detector, again resulting in a conductivity non-uniformity. Furthermore, it should be appreciated that modifications of this type may be achieved using combinations of the above identified effects in order to tailor the required level of non-uniformity for a particular application.

[0088] In the configuration shown in *Figure 1*, a cycle is performed in which upper plane **102** effectively transmits allowing signals to be received by lower plane **103**. A co-ordinate position is identified by reversing the operation of these planes, such that certain parts of the cycle include situations in which the lower plane **103** is effectively transmitting and the upper plane **102** is effectively transmitting. In a configuration of this type, it is preferable for the material types to be similar so as to provide substantially similar operations when plane **102** is transmitting or when plane **103** is transmitting. This is a particularly important constraint when the system is being used to measure current flow, given that different resistivities could be achieved in the different directions of current flow.

[0089] In the configuration shown in *Figure 16*, transmission always occurs from plane **1621**, although in different orientations, and detection always occurs from plane **1622**. With a configuration of this type, current always flows in the same direction therefore it is not essential for planes **1621** and **1622** to have equivalent mechanical constructions.

[0090] In the configuration shown in *Figure 16*, a detector is constructed from fabric having electrically conductive elements to define at least two electrically conductive planes and configured to produce an electrical output in response to a mechanical interaction. A second electrically conductive plane, such as plane **1622** of the detector, has at least one electrical characteristic that differs significantly in value from the value of said

characteristic of the first plane 1621.

[0091] In the detector shown in *Figure 16*, the upper receiving plane 1622 has a significantly lower resistance than the lower transmitting plane 1621. In this way, as the area of mechanical interaction increases, the amount of current flow increases significantly, thereby improving the definition of the system with respect to changes in the size of the mechanical interaction, and allowing for less intensive calculations when determining force etc.

Claims

1. A position detector constructed from fabric having electrically conductive elements, said detector comprising at least two electrically conducting planes, wherein
 - an electric potential is applied across at least one of said planes to determine the position of a mechanical interaction; and
 - a second electrical property is determined to identify additional properties of said mechanical interactions.
2. A position detector according to claim 1, configured to measure current or resistance as said second electrical property.
3. A detector according to claim 1, configured to determine applied force, applied pressure, area of contact or orientation of an object as the additional property of said mechanical interactions.
4. A detector according to claim 1, including processing means for modifying a second electrical characteristic with respect to a measurement made for said first electrical characteristic.
5. A detector according to claim 1, wherein composite layers of fabric are provided to enhance measurement of a property or to facilitate the measurement of multiple properties.
6. A detector according to claim 1, wherein a stylus is applied to the detector such that a first electrical property of a mechanical interaction determines the position of the interaction and a second electrical property determines the force or pressure applied to said stylus.
7. A detector according to claim 1, wherein the detector interacts mechanically with parts of a human body; a first electrical property determines the position of a mechanical interaction and a second electrical property determines the area of coverage.
8. A detector according to claim 1, wherein electronic switching means are provided to change electrical configurations to the detector and analogue to digital conversion means are configured to convert analogue signals to digital representations of said signals for subsequent mechanical property calculations.
9. A method of detection, performed with respect to a detector constructed from fabric and having electrically conducting elements configured to provide at least two electrically conducting planes, comprising the steps of
 - applying a potential across at least one of said planes to determine the position of a mechanical interaction; and
 - measuring a second electrical property to identify additional properties of said mechanical interactions.
10. A detector constructed from fabric having electrically conductive elements to define at least two electrically conductive planes and configured to produce an electrical output in response to a mechanical interaction, wherein
 - at least one of said planes includes first portions and second portions, said first portions have a higher resistance than said second portions and said first higher resistance portions are more flexible than said second portions.
11. A detector according to claim 10, wherein said high resistance portions are configured as flexible portions to facilitate rotational movement about similar portions in a co-operating conductive plane.
12. A detector according to claim 11, wherein said conductive elements are separated from similar elements of a co-operating plane by being supported by said flexible portions.
13. A method of constructing a detector from fabric, wherein
 - electrically conductive elements are configured to define at least two electrically conductive planes so as to produce an electrical output in response to a mechanical interaction; wherein at least one of said planes includes first portions and second portions; said first portions have a higher resistance than said second portions; and
 - said first higher resistance portions are more flexible than said second portions.
14. A detector constructed from fabric having electrically conductive elements and configured to produce

electrical outputs in response to mechanical interactions, wherein

said detector is divided into a plurality of regions;
 each of said regions includes a first conducting plane and a second conducting plane;
 a mechanical interaction results in conducting planes of at least one of said regions being brought closer together; and
 a potential is applied across at least one of said planes to determine the position of said mechanical interaction.

15. A detector according to claim 14, wherein at least one of said conducting planes is unique to a region and the co-operating conducting plane is shared with a plurality of regions.

16. A detector according to claim 15, wherein signals are derived independently from a plurality of regions by a time division multiplexing operation.

17. A method of constructing a detector from fabric having electrically conductive elements and configured to produce electrical outputs in response to mechanical interactions, said detector being configured such that a potential is applied across at least one of said planes to determine the position of the mechanical interaction, said method comprising the steps of

dividing the detector into a plurality of regions;
 providing a first conductive plane and a second conductive plane for each of said regions;
 bringing together conductive planes of at least one of said regions in a response to a mechanical interaction.

18. A fabric constructed from electrically conducting fibres and from electrically insulating fibres by a mechanical process, wherein electrical connection means are connected to electrically conducting fibres of said fabric during said mechanical process.

19. A fabric according to claim 18, wherein said mechanical process is a knitting operation or a weaving operation.

20. A fabric according to claim 18, wherein said connector is an insulation displacement connector.

21. A fabric according to claim 18, wherein said connectors are enclosed within conducting epoxy resin, ink or silicone.

22. A method of constructing a fabric from electrically conducting fibres and from electrically insulating fi-

bres by a mechanical process, comprising the steps of

providing a supply of electrical connection devices for electrical connection to electrically conducting fibres of said fabric;
 modifying the mechanical process at selected positions so as to incorporate the electrically conducting device as part of the fabric; and
 applying sealing means to said electrically conducting device so as to secure said devices to the machined fabric.

23. A detector constructed from fabric having electrically conductive elements to define at least two electrically conducting planes and configured to produce an electrical output in response to a mechanical interaction, wherein

a potential is applied across at least one of said planes to determine the position of a mechanical interaction and said second electrical property is determined to identify additional properties of said mechanical interactions; and
 a conductivity non-uniformity is included in at least one of said planes so as to modify an electrical response to a mechanical interaction.

24. A method of constructing a detector from fabric configured to produce an electrical output in response to mechanical interactions said detector being configured such that a potential is applied across at least one of said planes to determine the position of a mechanical interaction and a second electrical property is determined to identify additional properties of said mechanical interactions, said method comprising the steps of defining at least two electrically conducting planes from electrically conductive elements and introducing a conductivity non-uniformity in at least one of said planes so as to modify an electrical response to a mechanical interaction.

25. A detector constructed from fabric having electrically conductive elements to define at least two electrically conductive planes and configured to produce an electrical output in response to a mechanical interaction, wherein

a second electrically conductive plane of said detector has at least one electrical characteristic that differs significantly in value from the value of said characteristic of the first plane.

26. A detector according to claim 25, wherein one of said planes is used as a detector and voltages are applied sequentially in different directions to the other co-operating plane.

27. A method of constructing a detector, comprising the steps of

constructing electrically conductive elements
from fabric to define at least two electrically
conducting planes configured to produce elec-
trical output in response to a mechanical inter-
action; and
configuring a second electrically conductive
plane of said detector with at least one electri-
cal characteristic that differs significantly in val-
ue from the value of said characteristic of said
first plane.

15

20

25

30


35

40

45

50

55

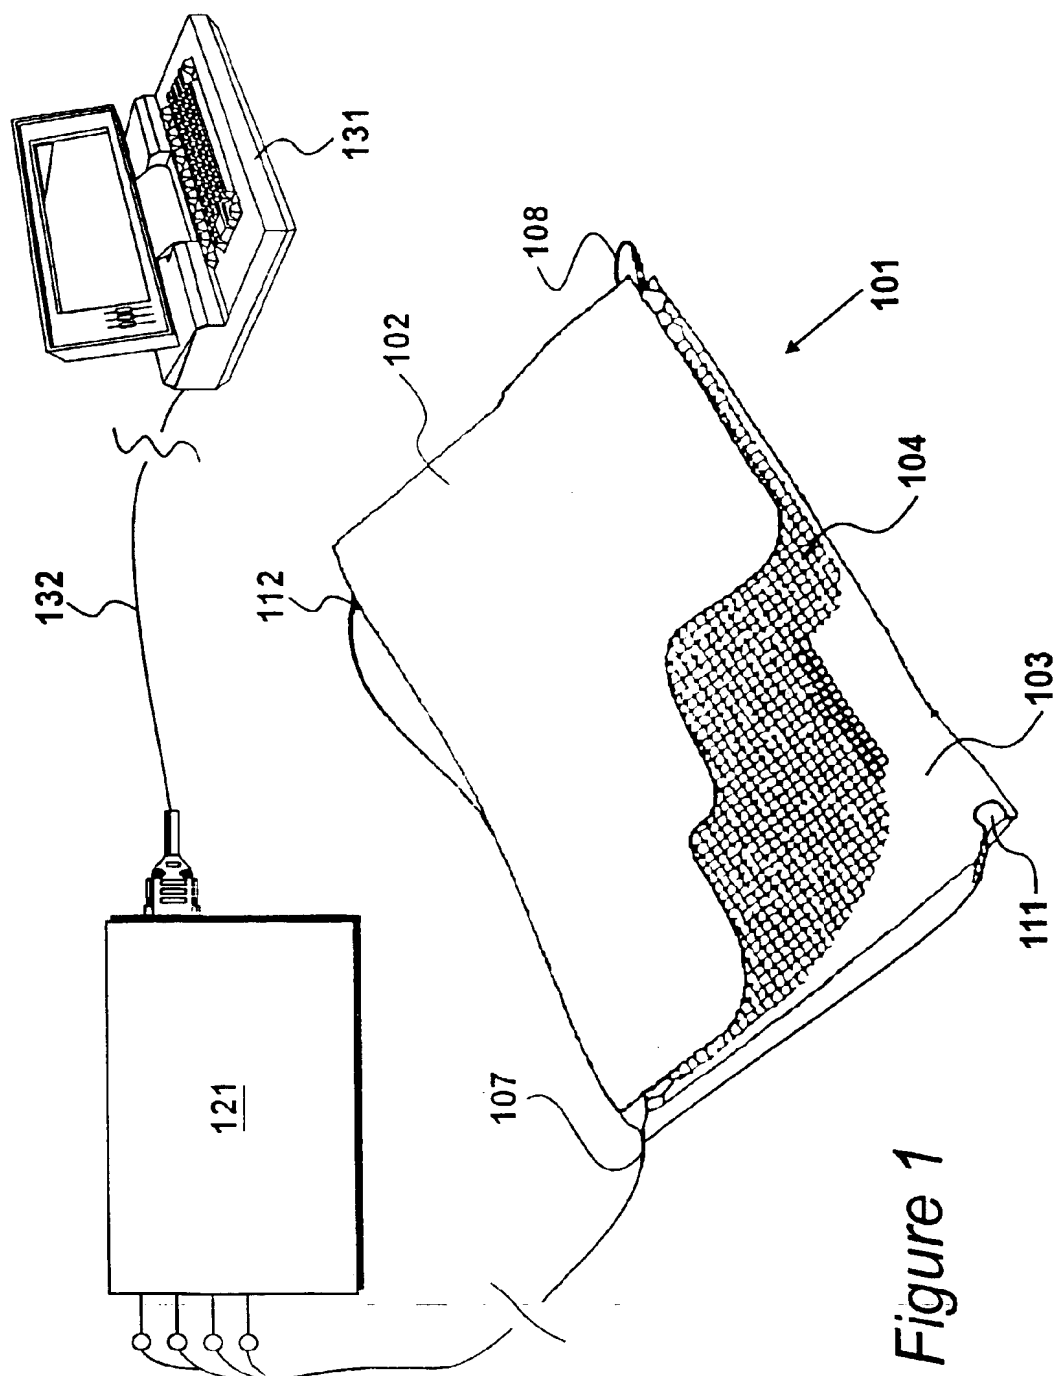

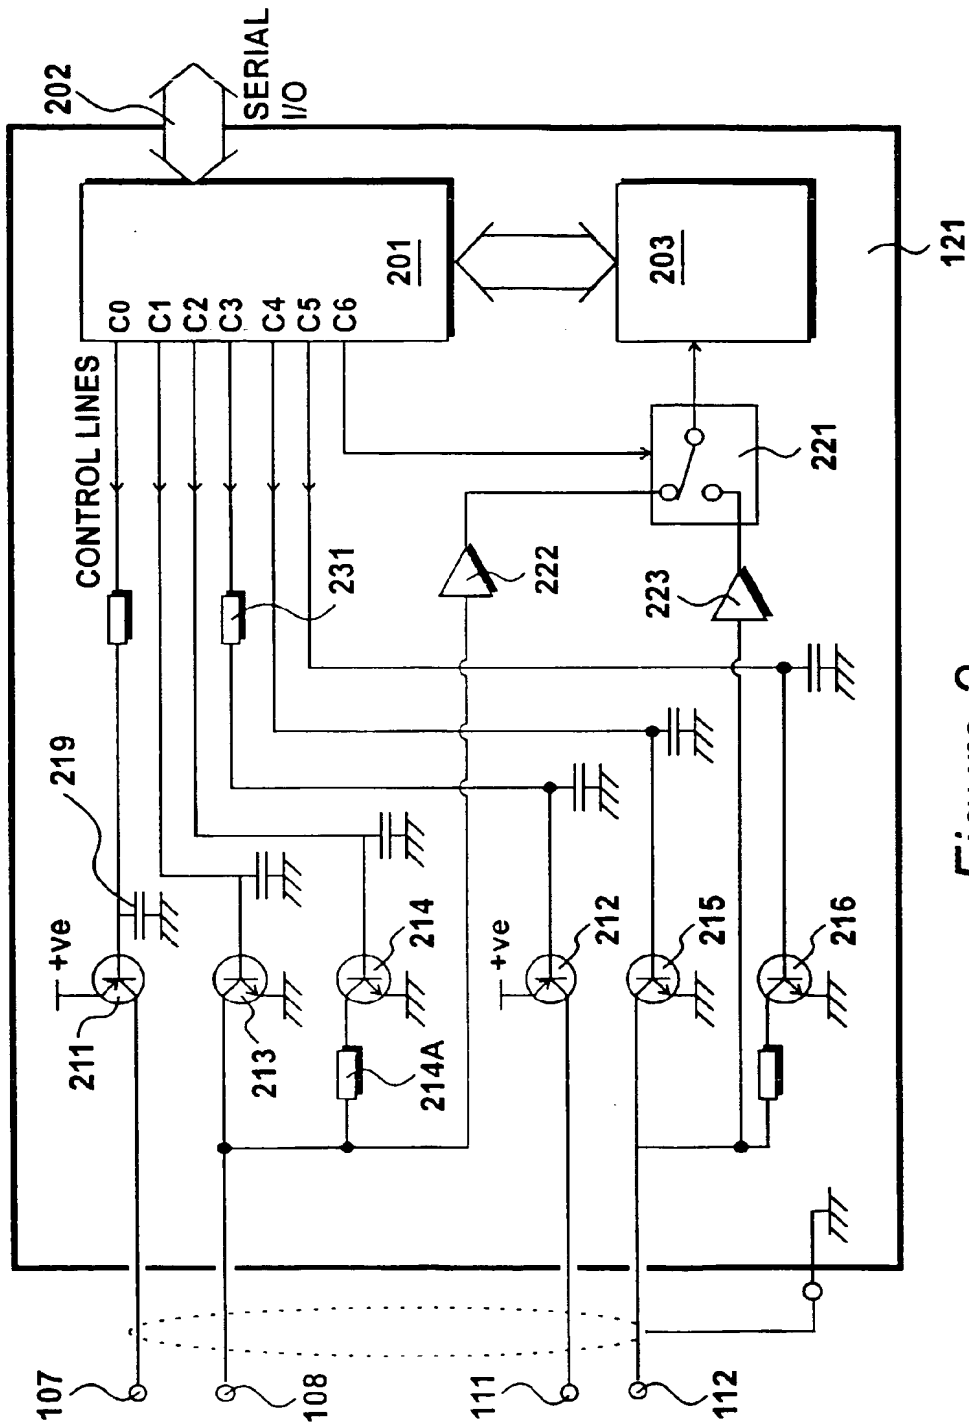
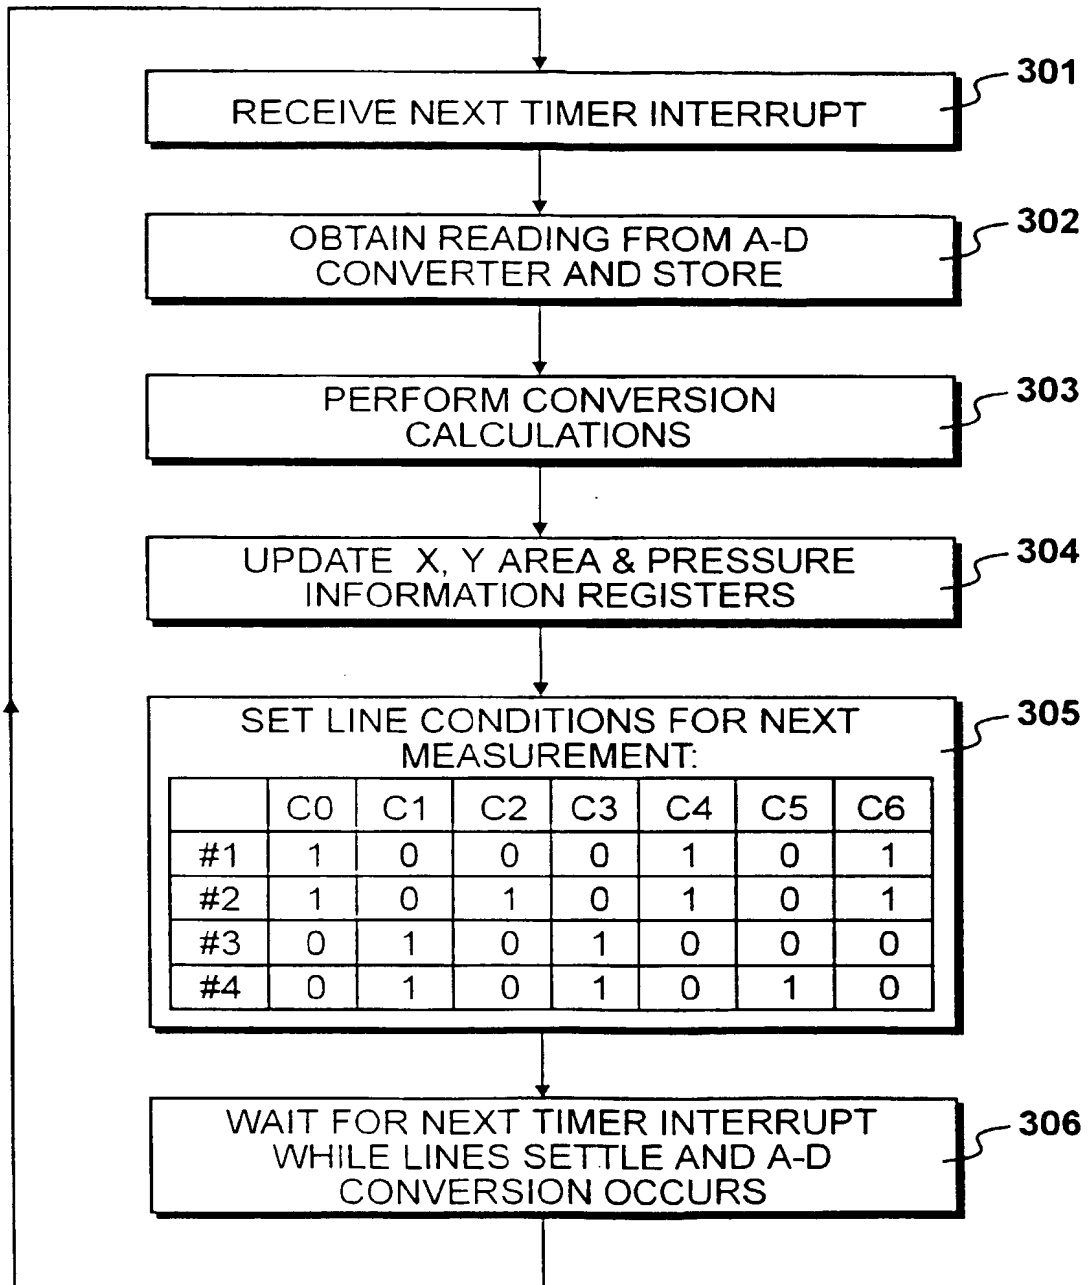


Figure 2

*Figure 3*

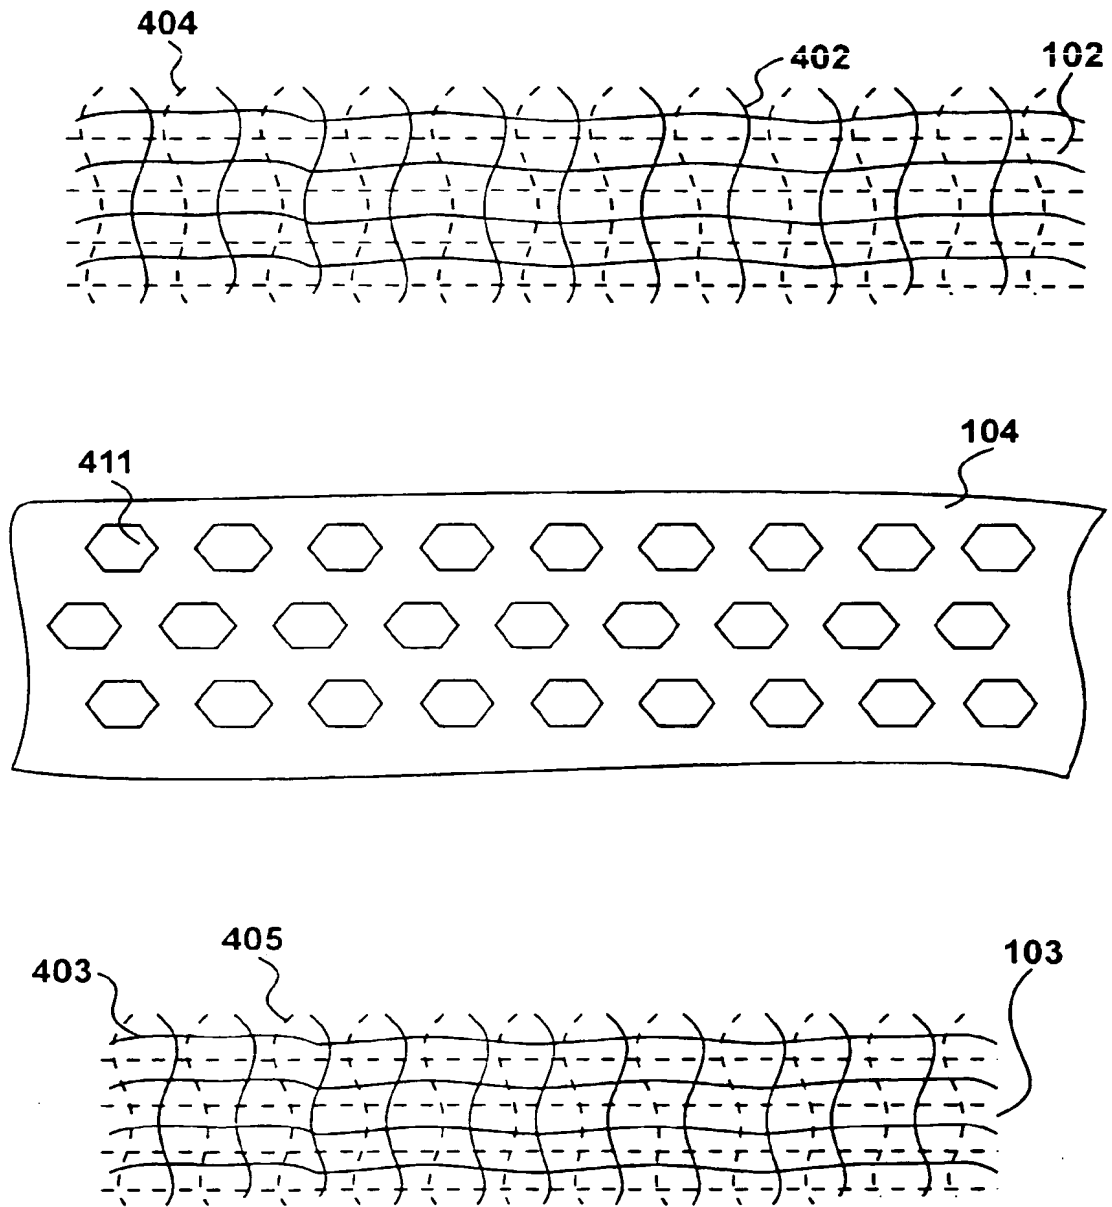


Figure 4

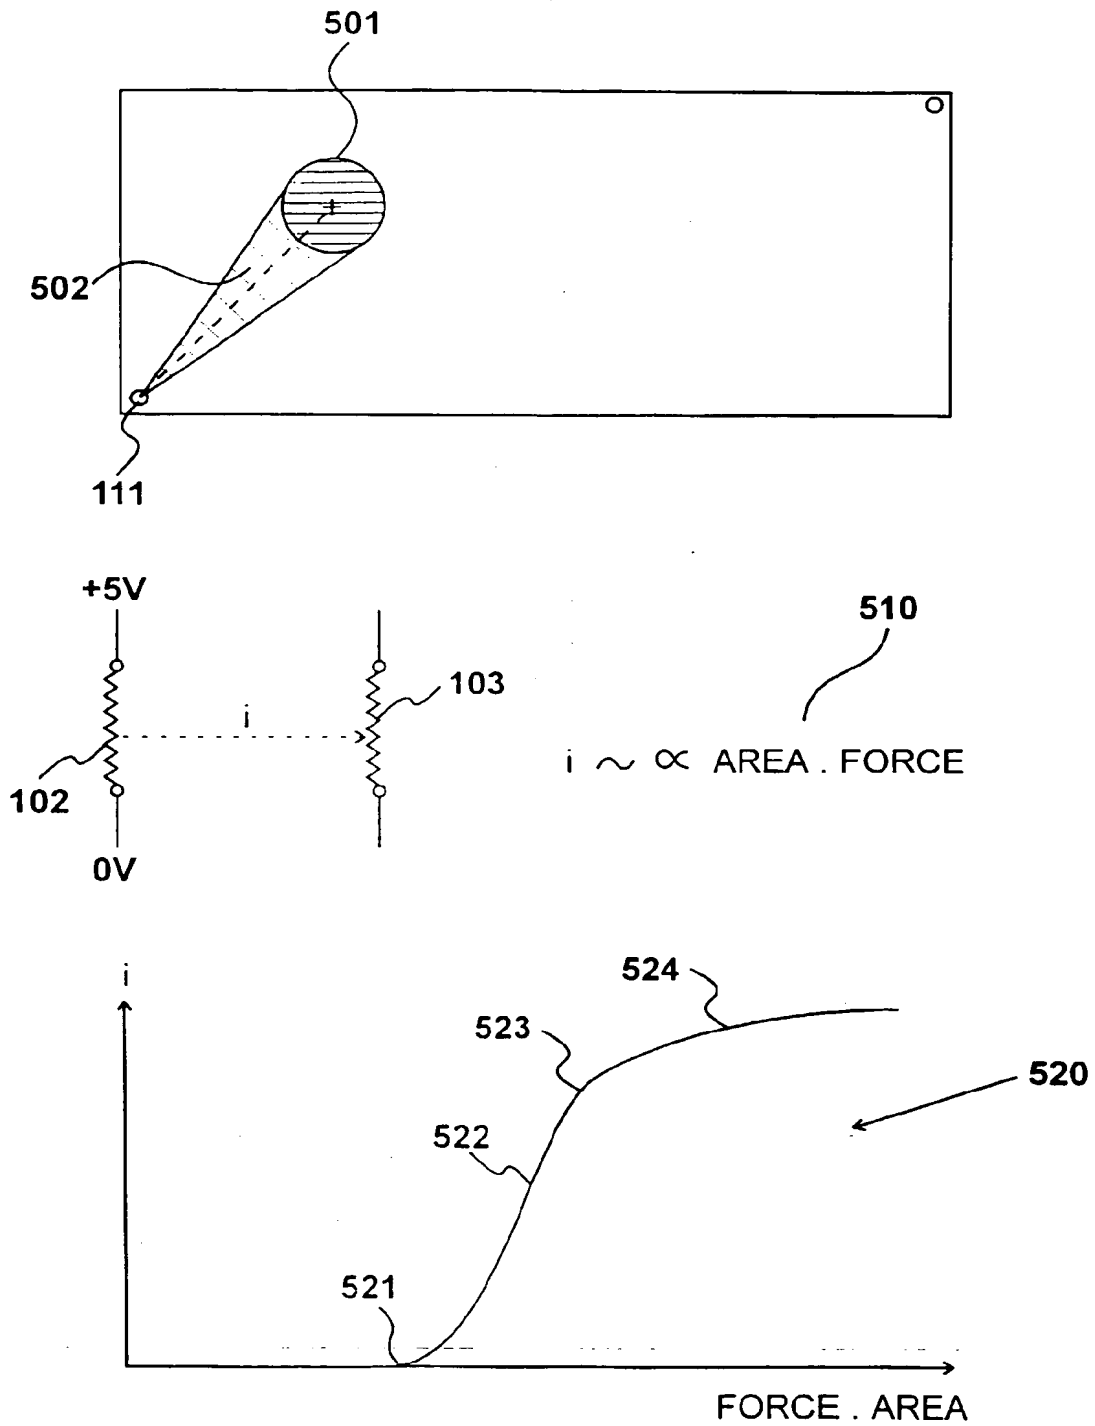


Figure 5

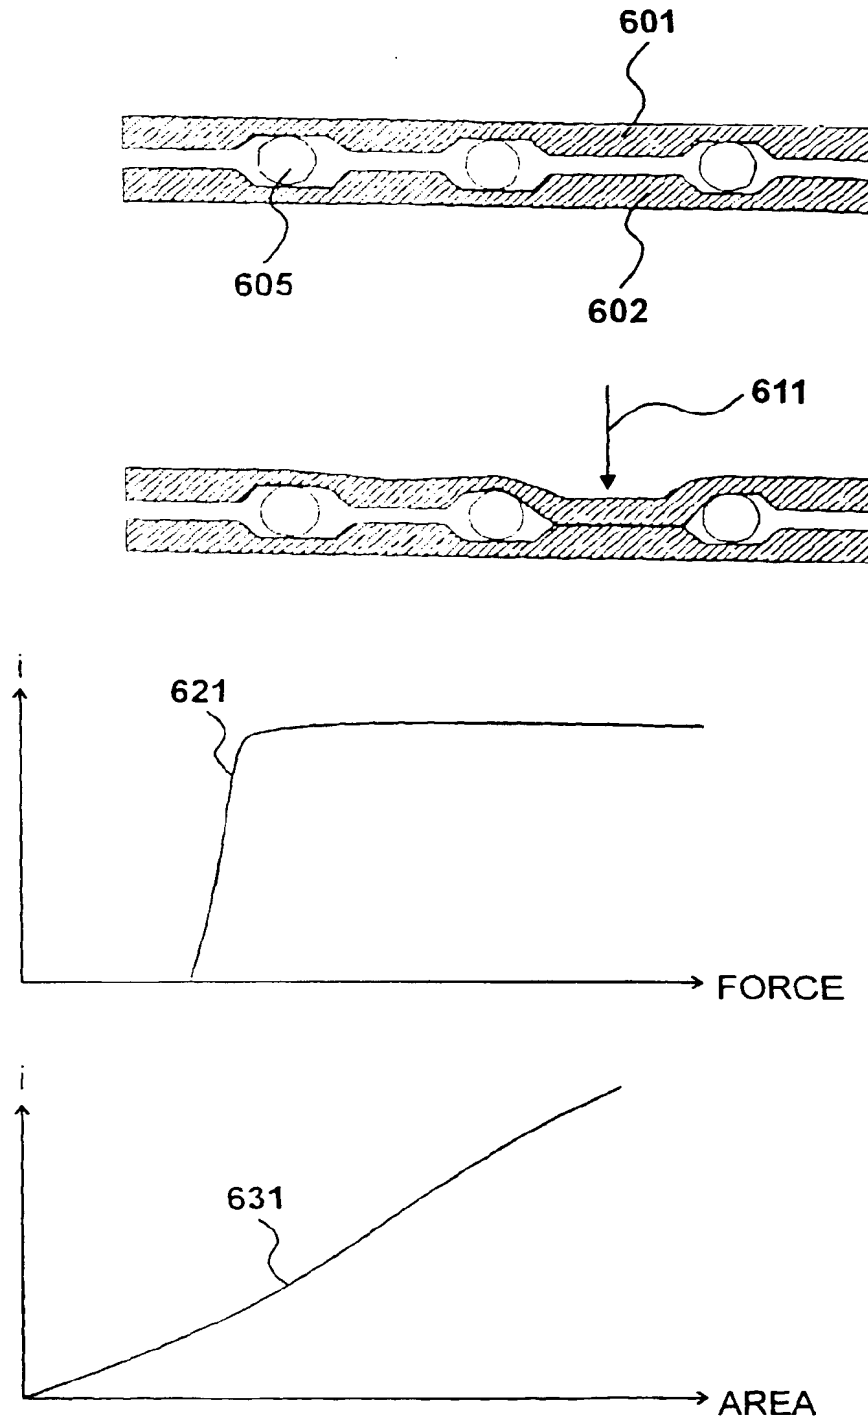


Figure 6

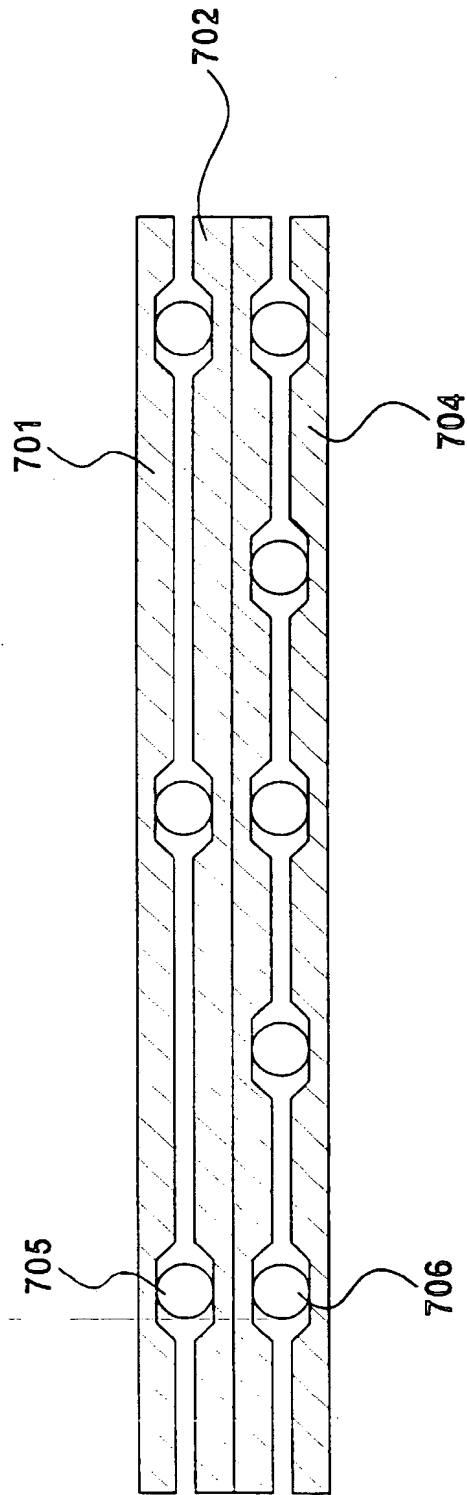


Figure 7

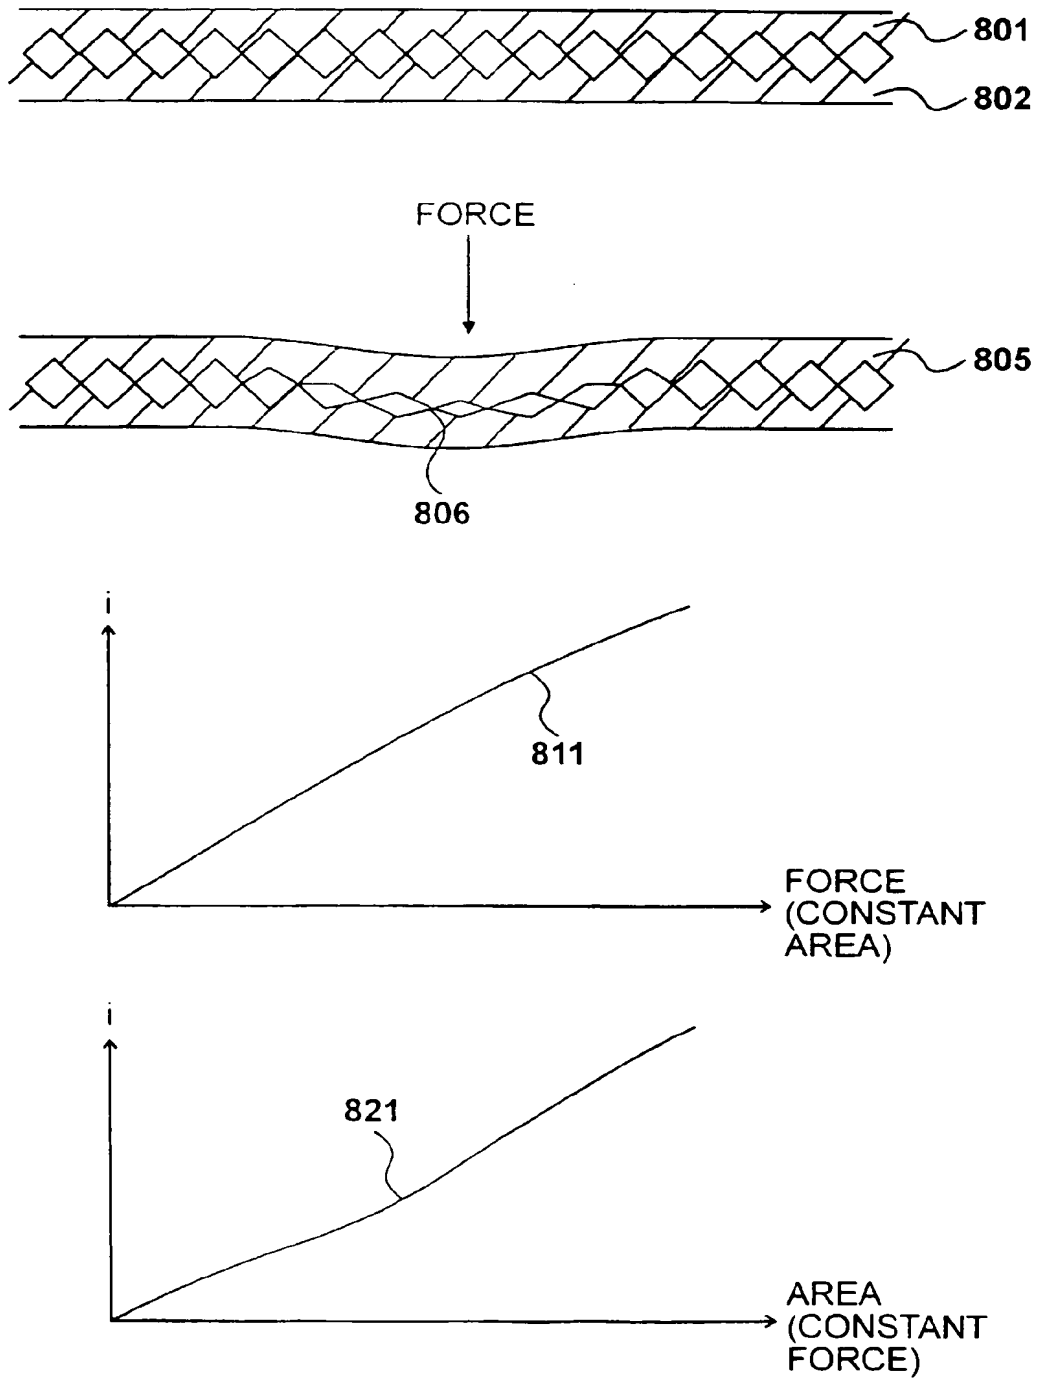


Figure 8

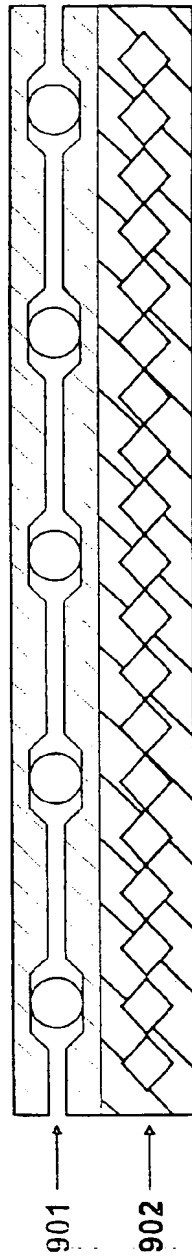


Figure 9

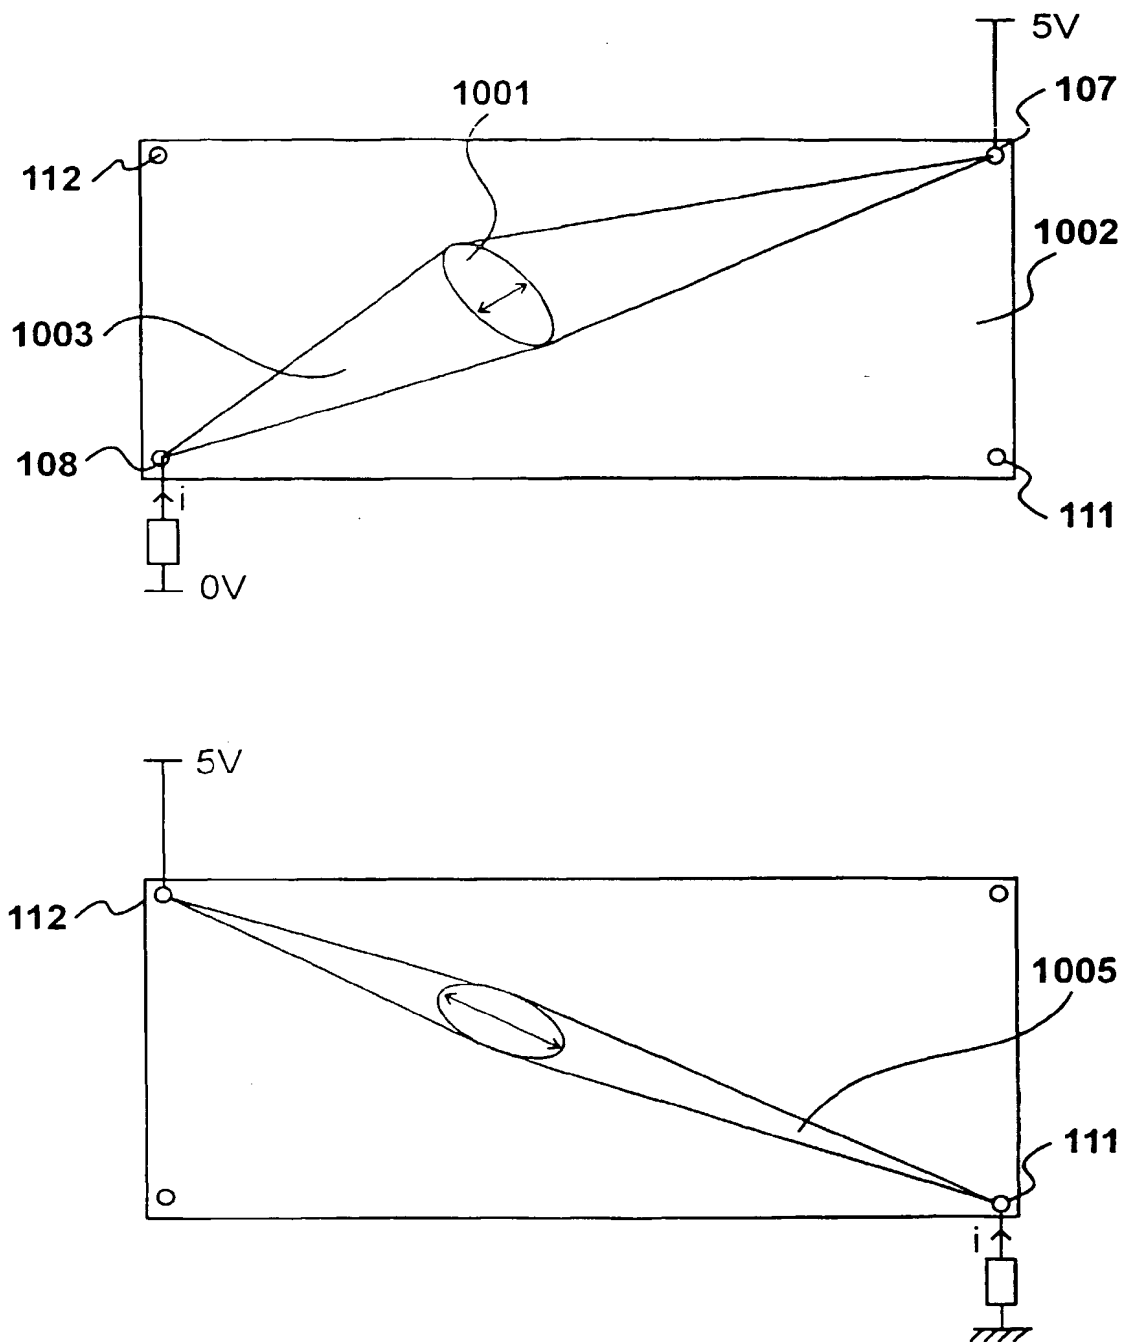


Figure 10

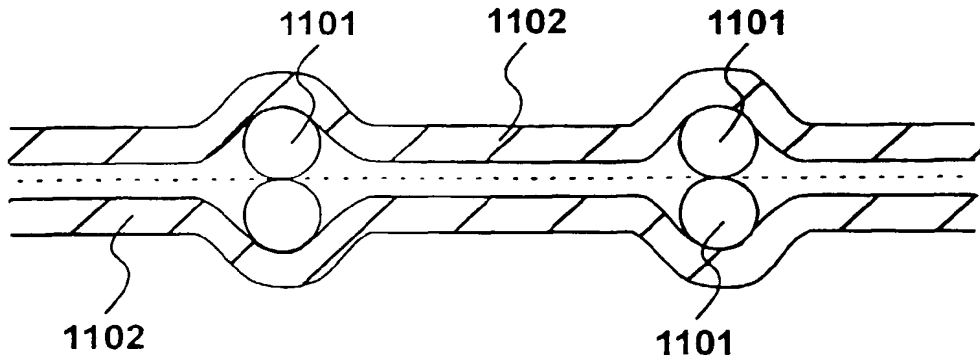


Figure 11A

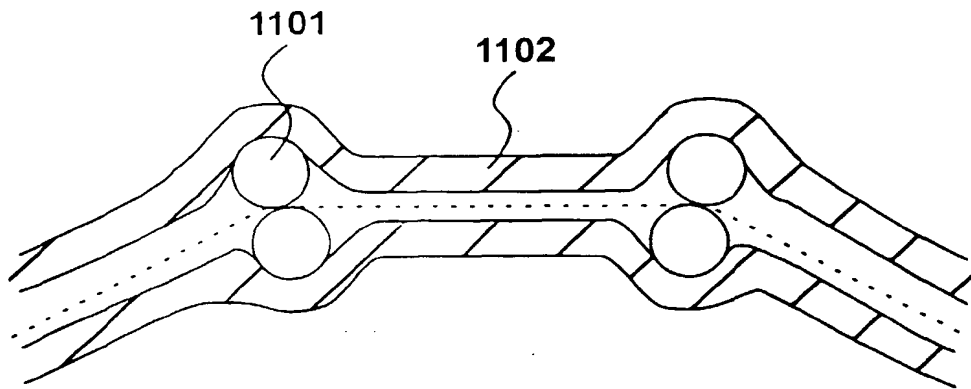


Figure 11B

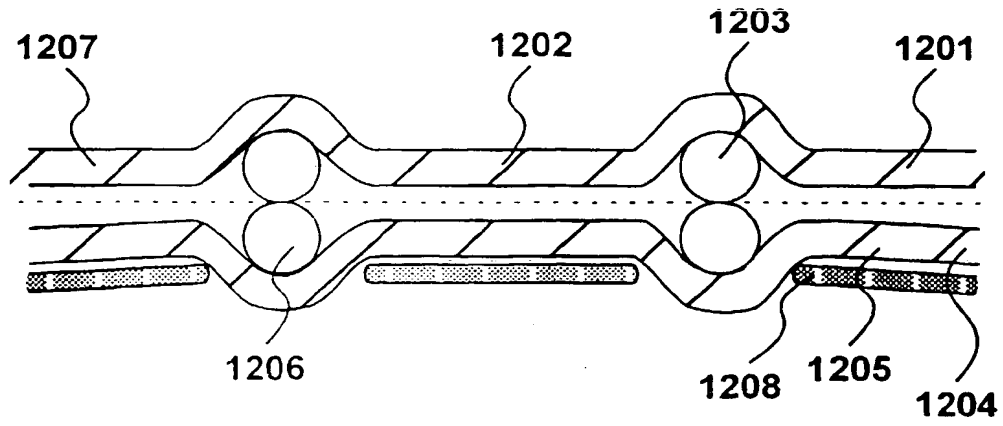


Figure 12A

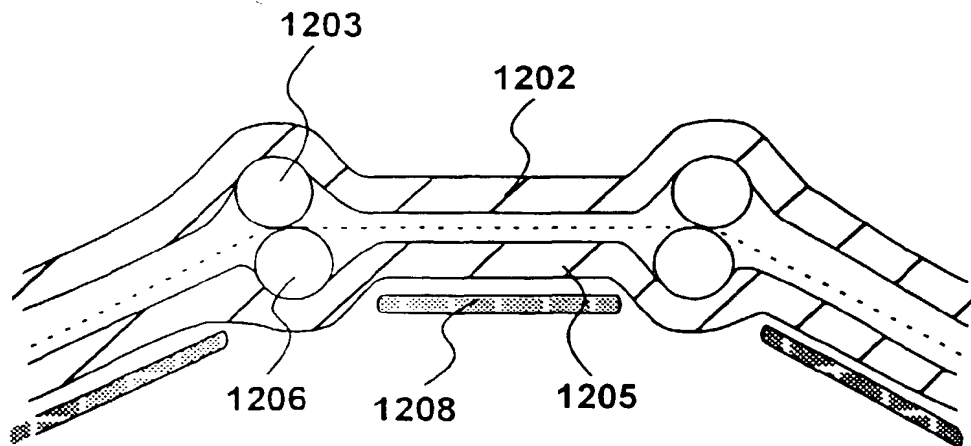


Figure 12B

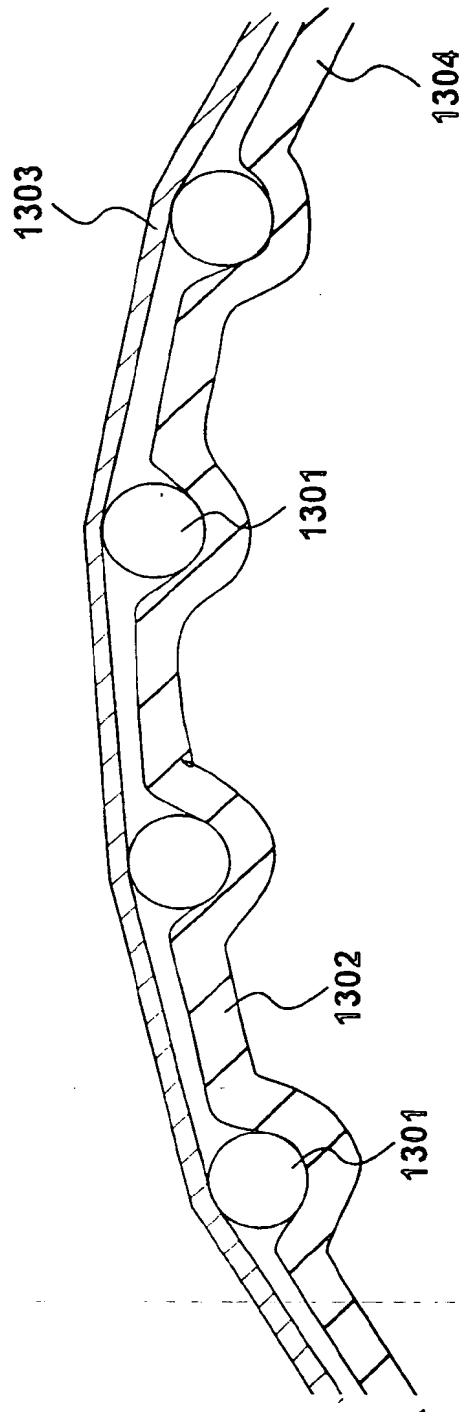


Figure 13

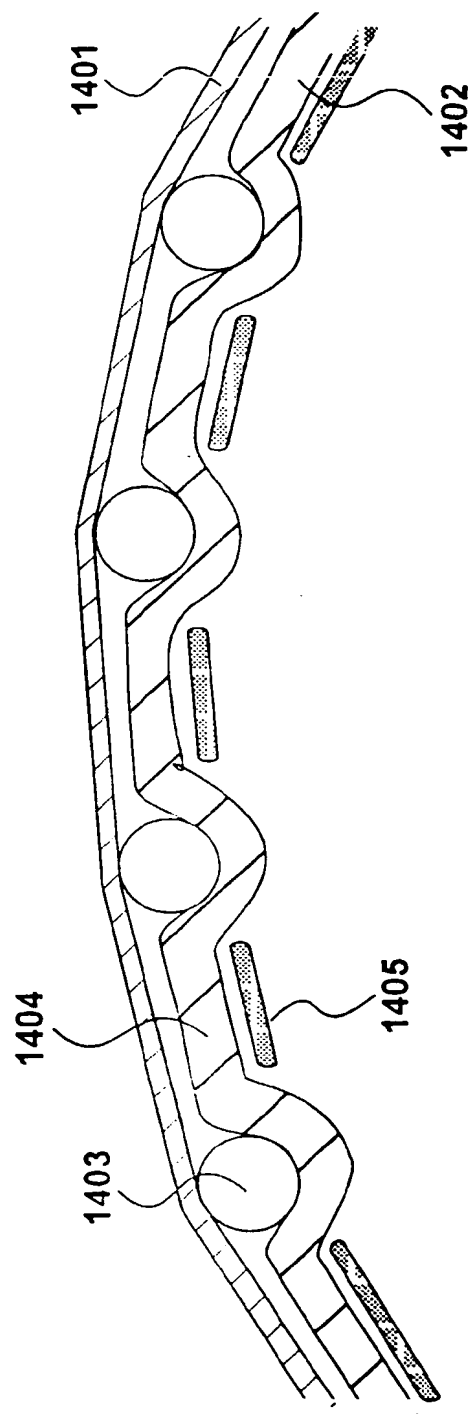


Figure 14

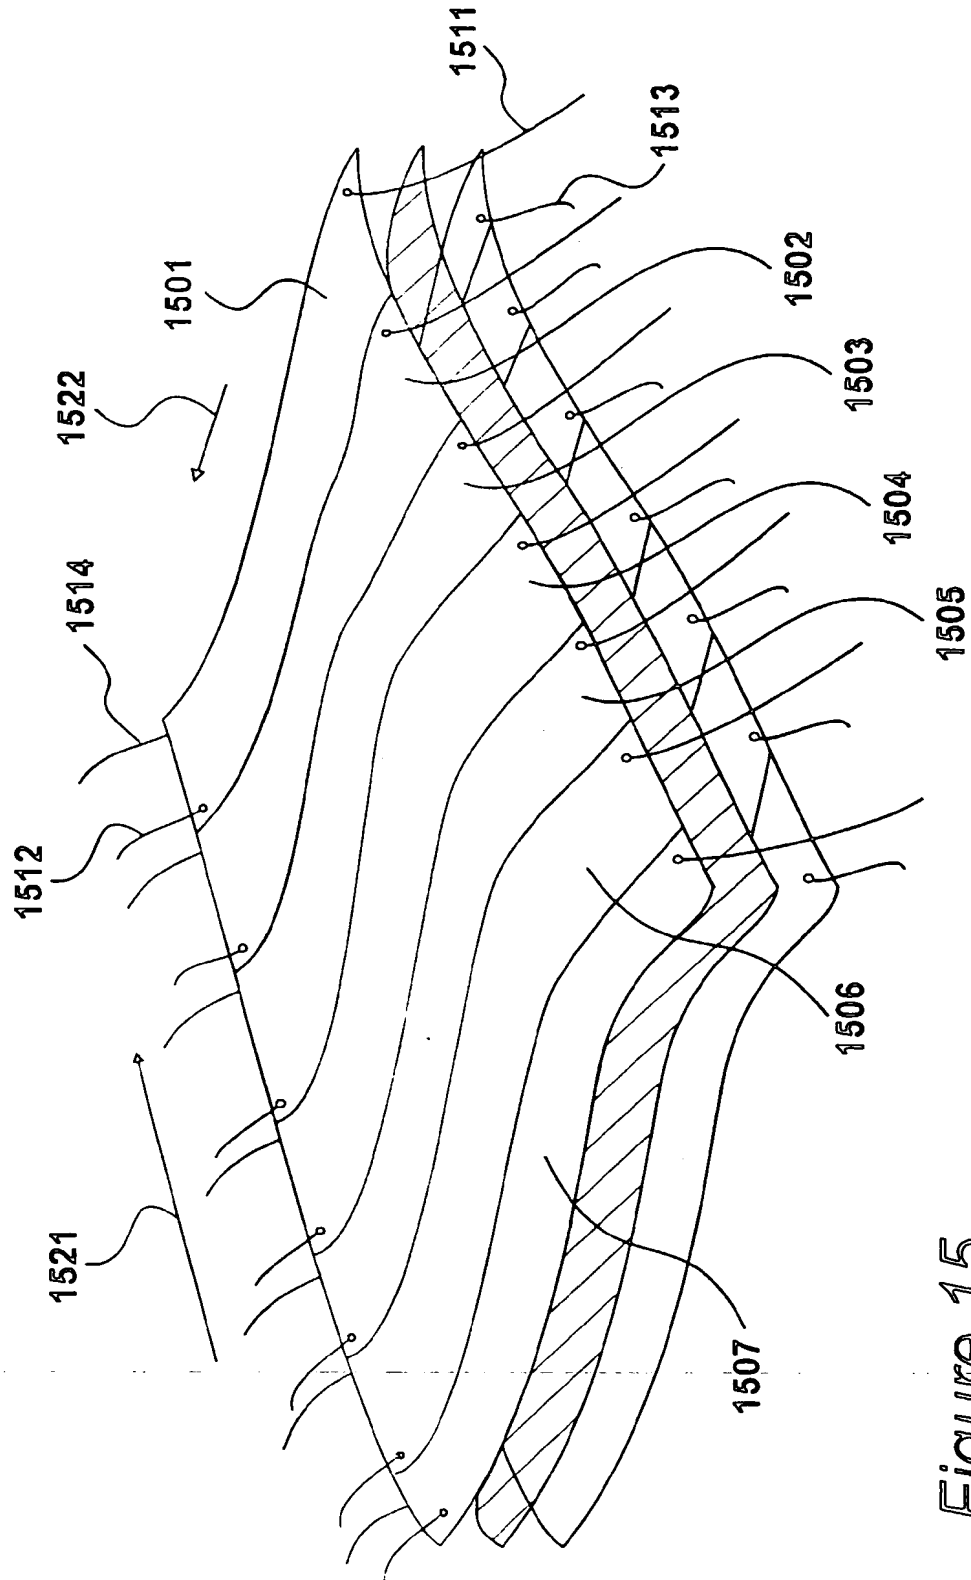


Figure 15

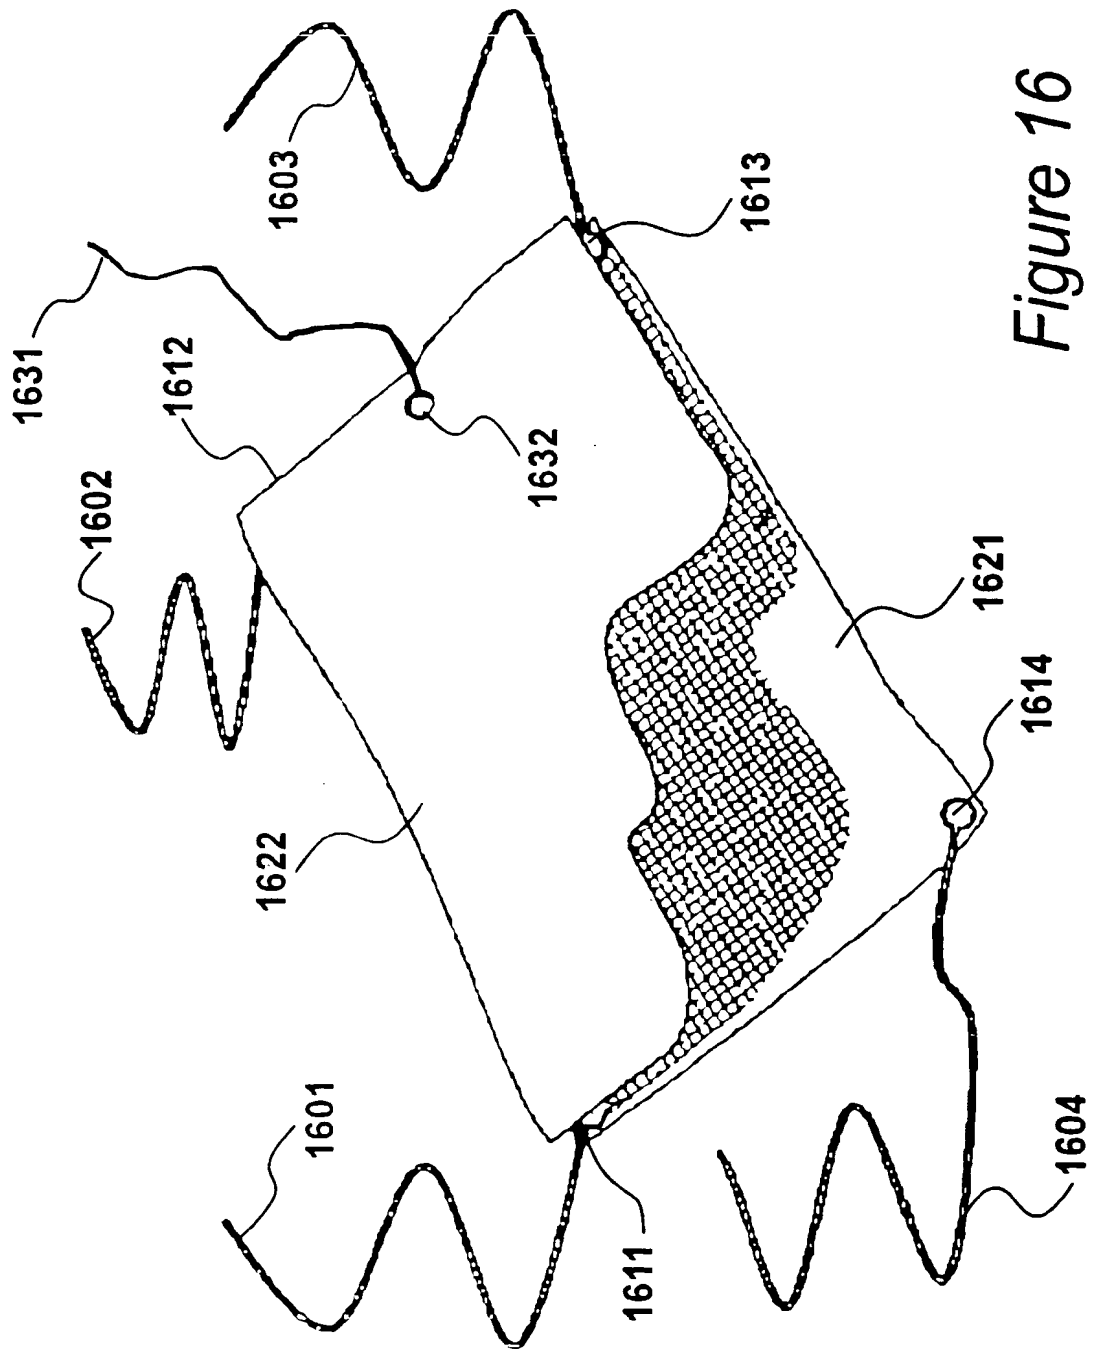


Figure 16

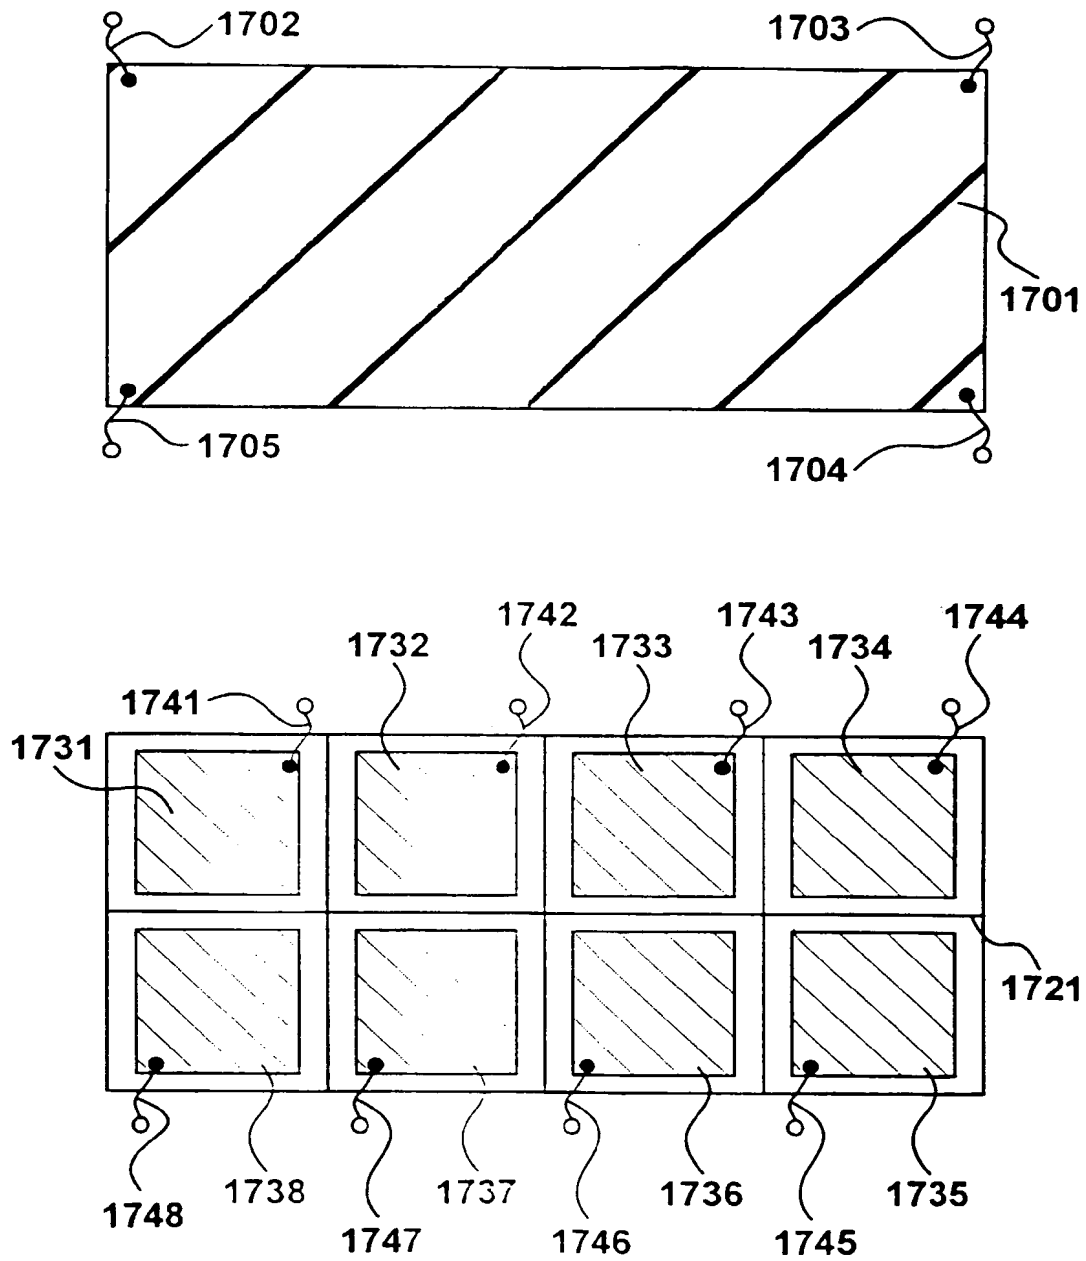


Figure 17

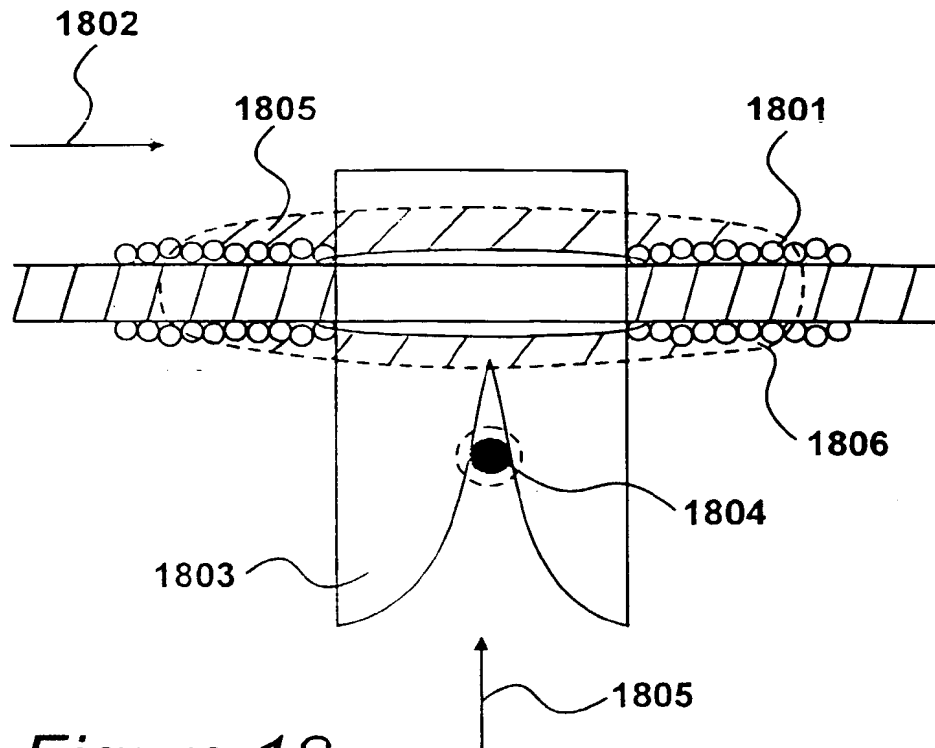


Figure 18

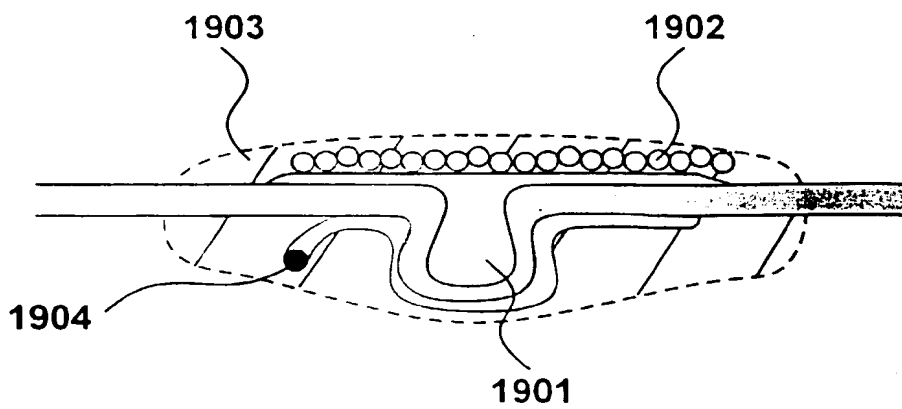


Figure 19

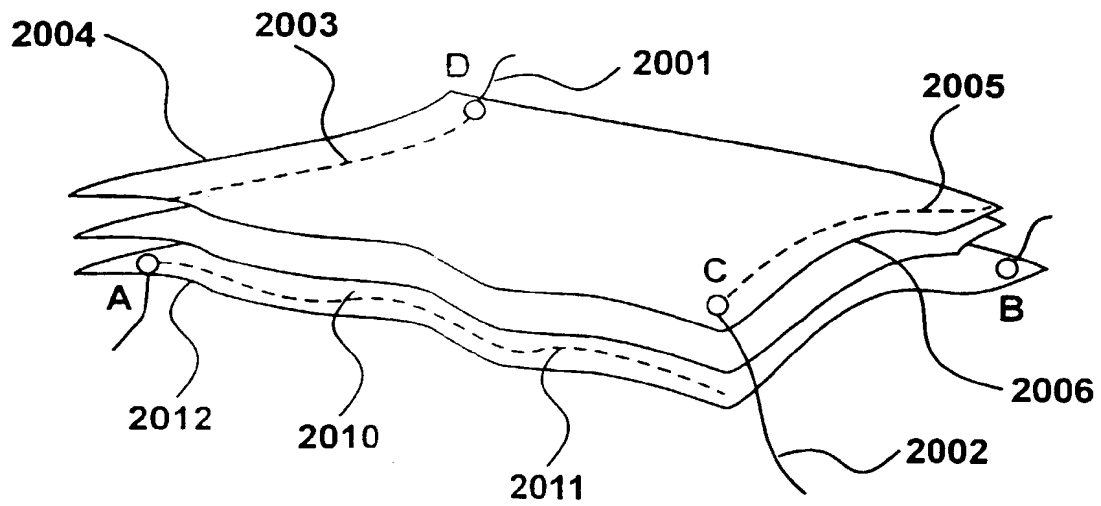


Figure 20

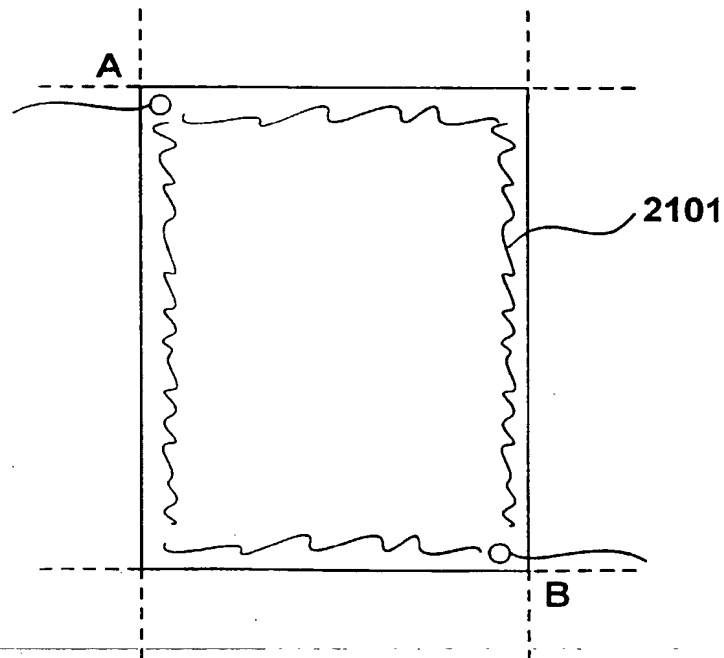


Figure 21

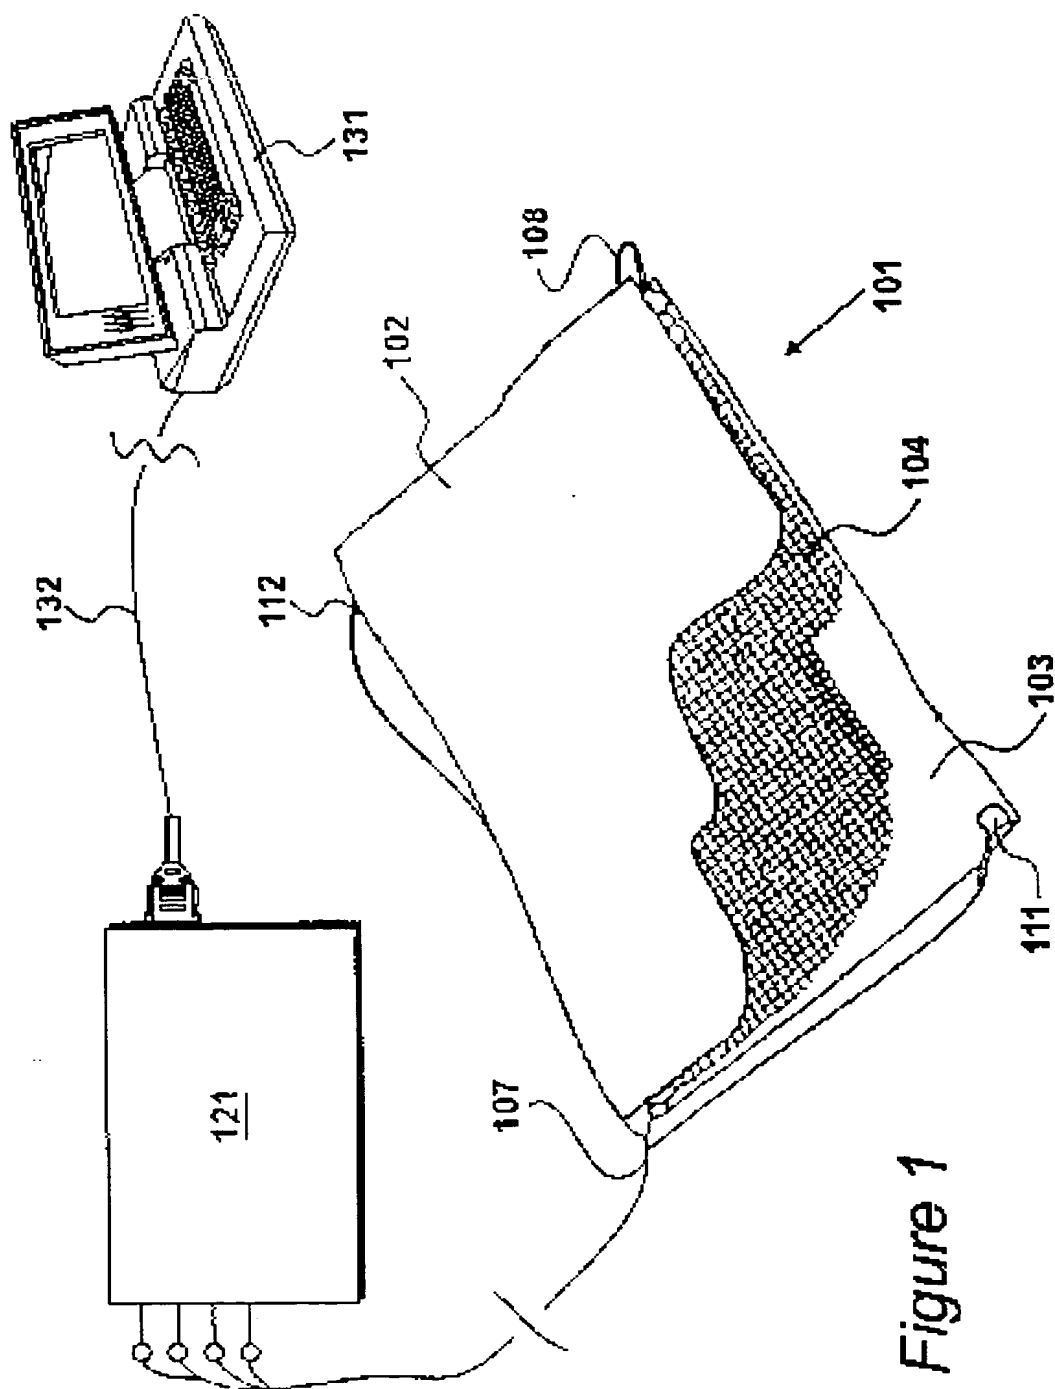


Figure 1

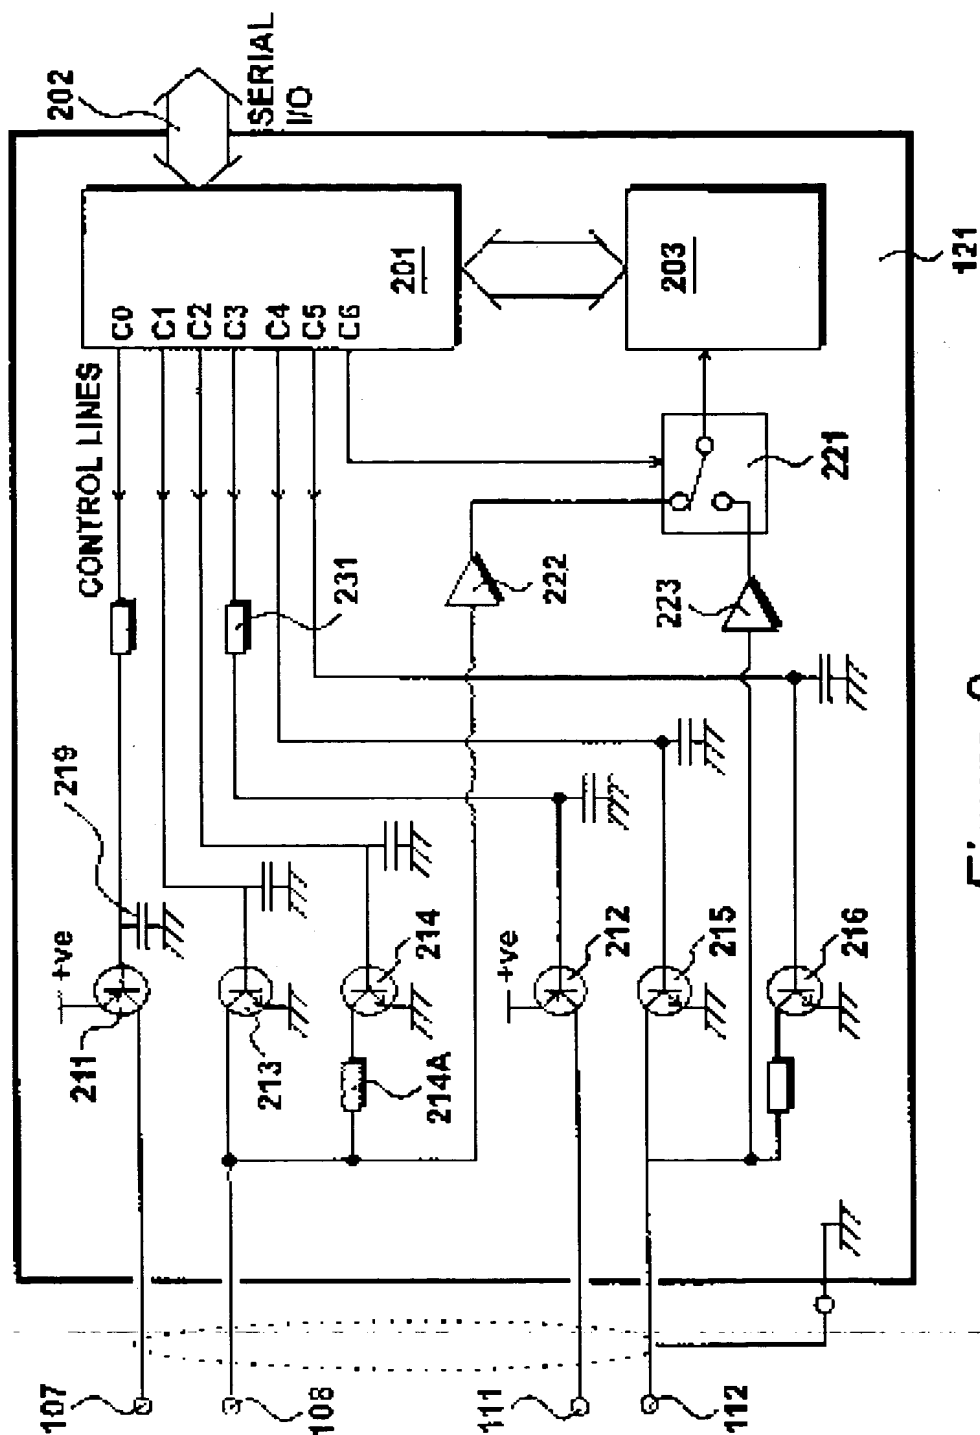
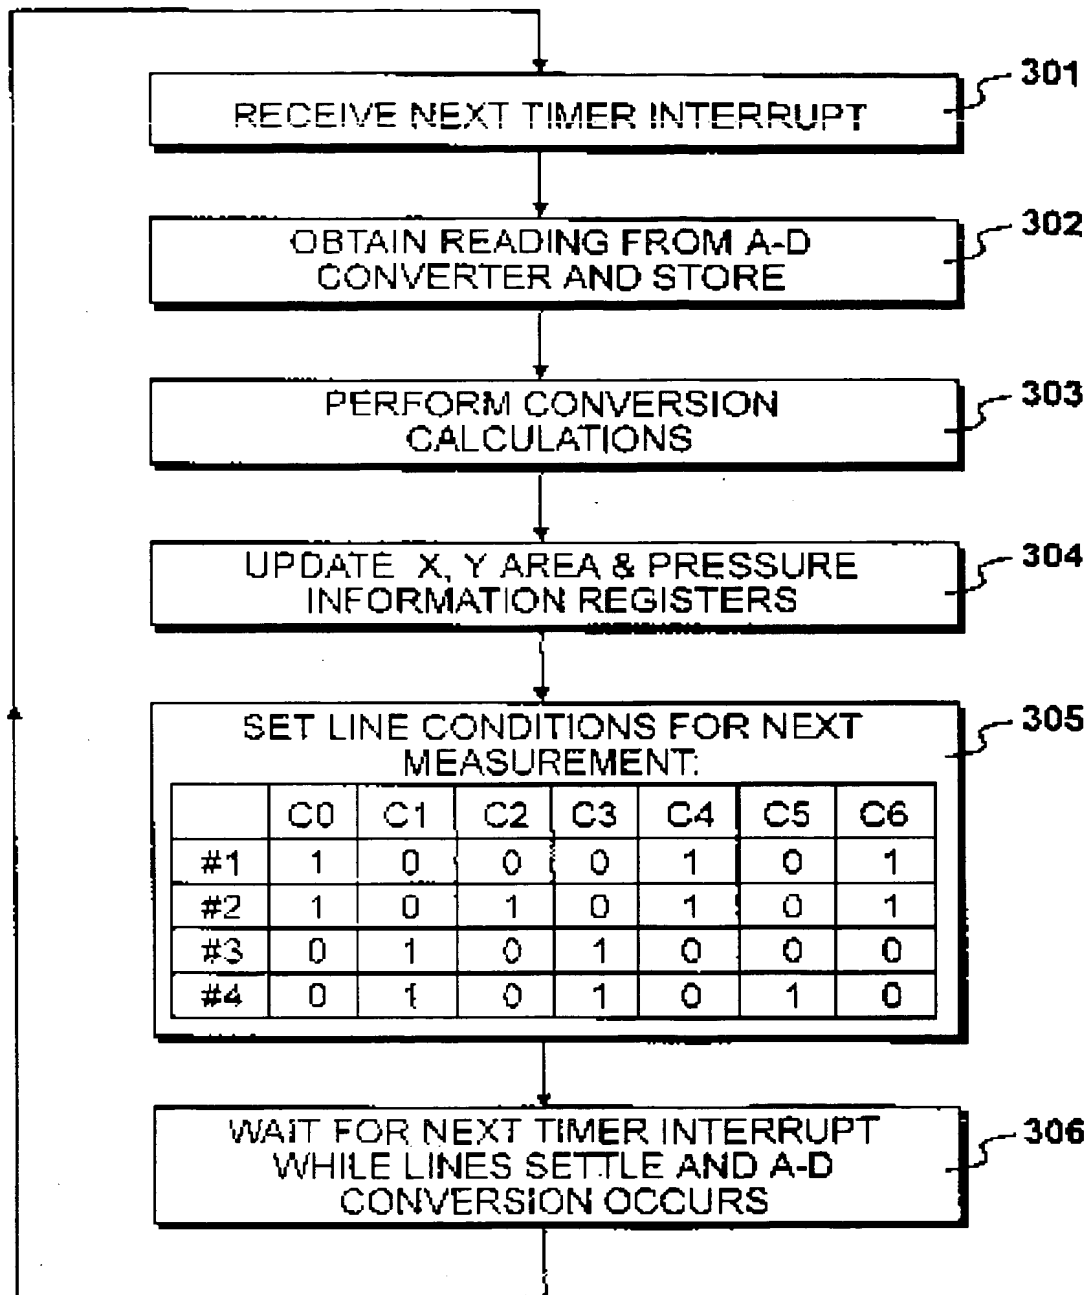


Figure 2

*Figure 3*

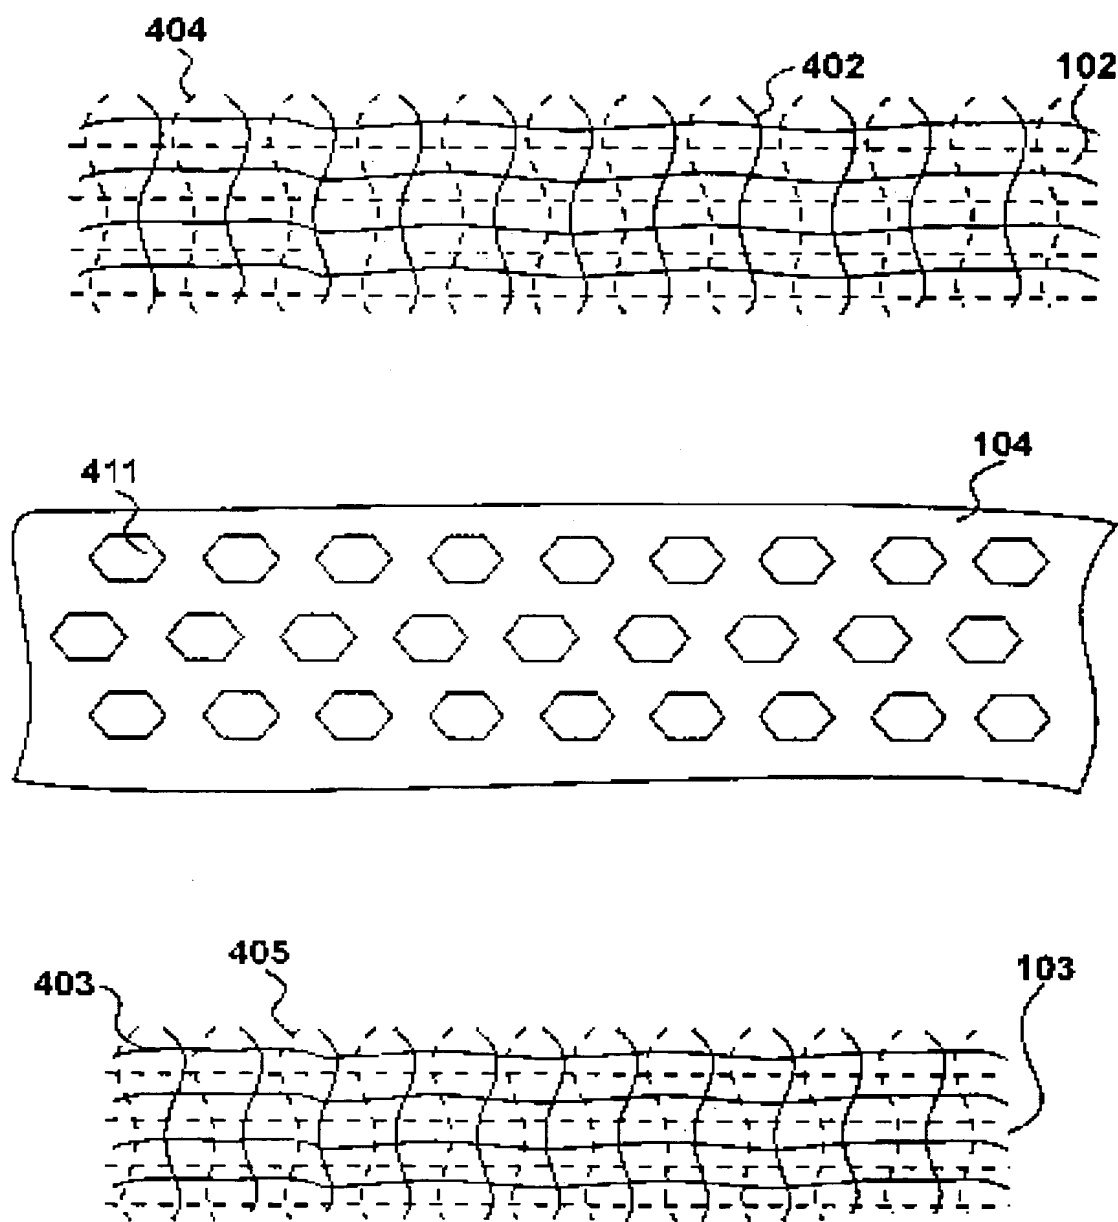


Figure 4

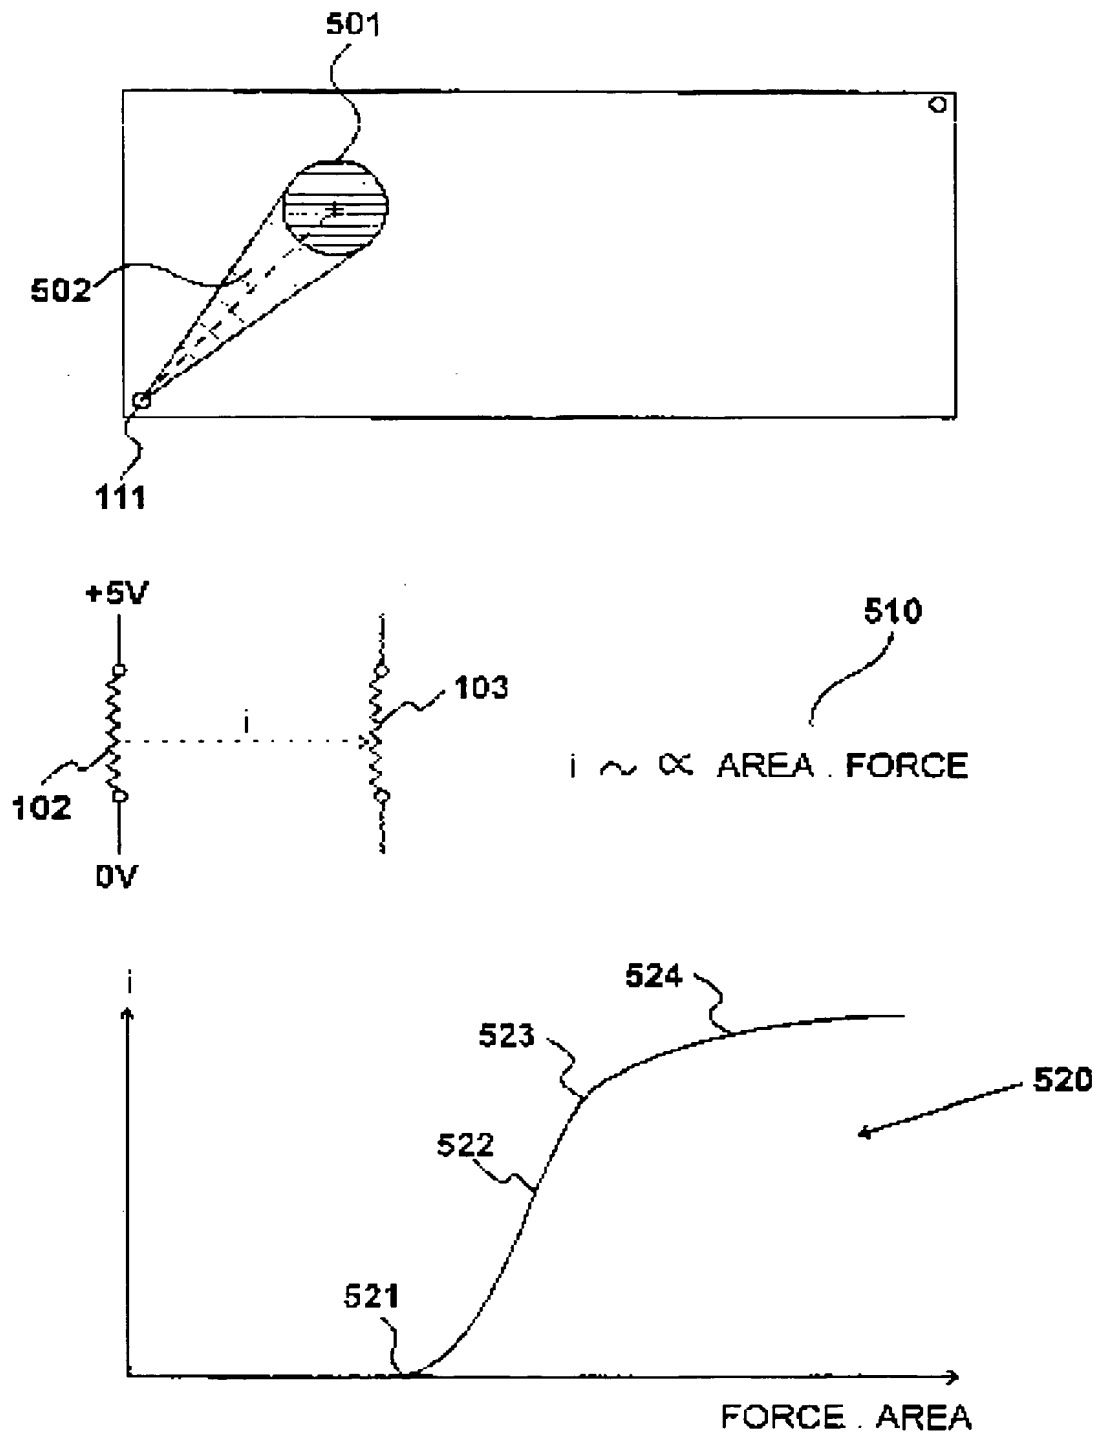


Figure 5

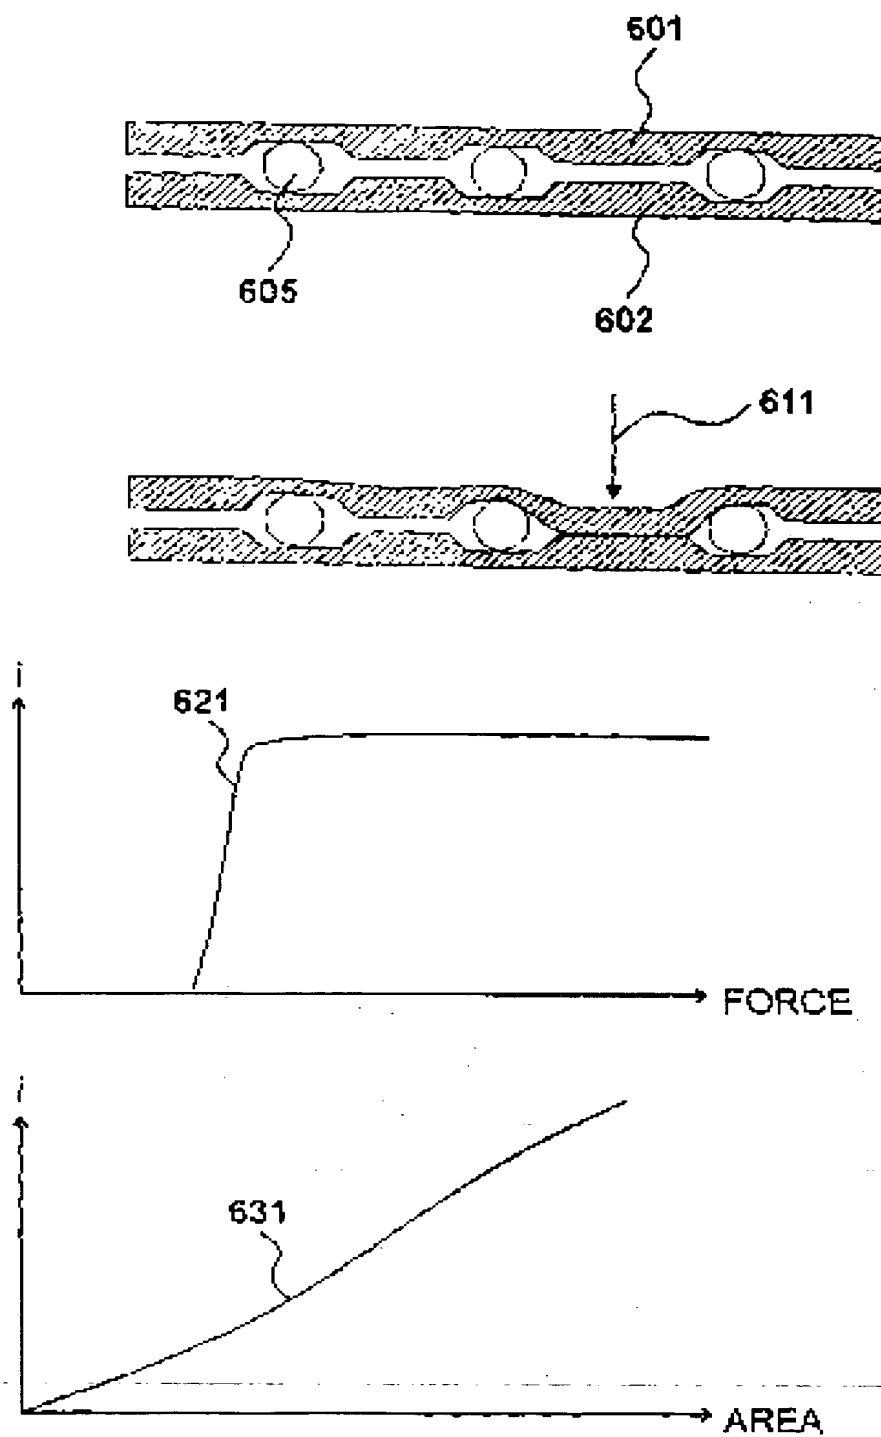


Figure 6

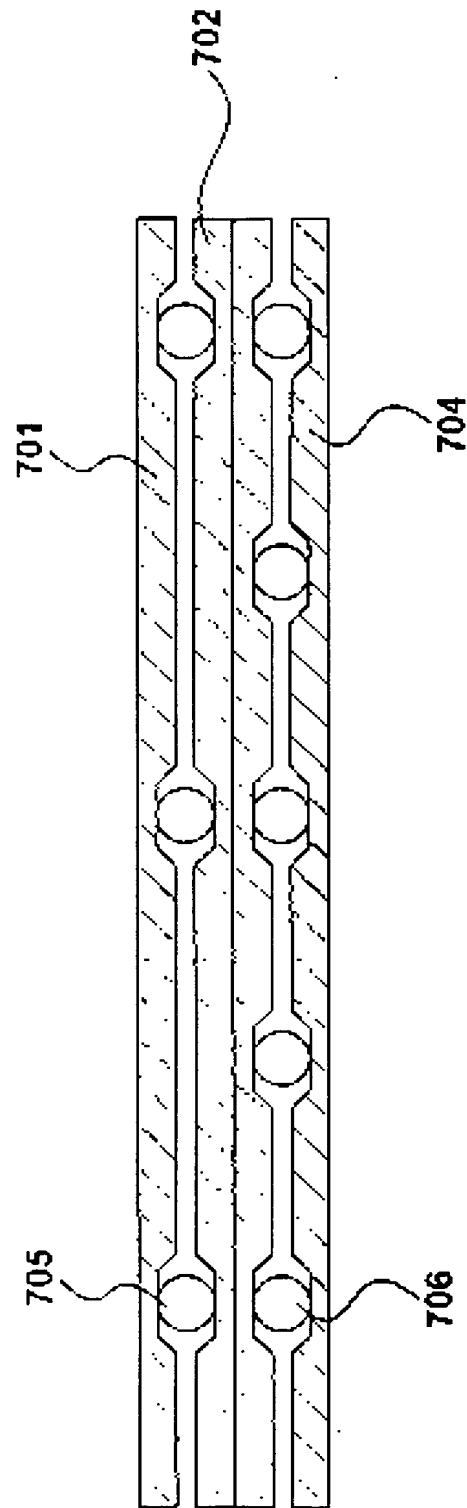


Figure 7

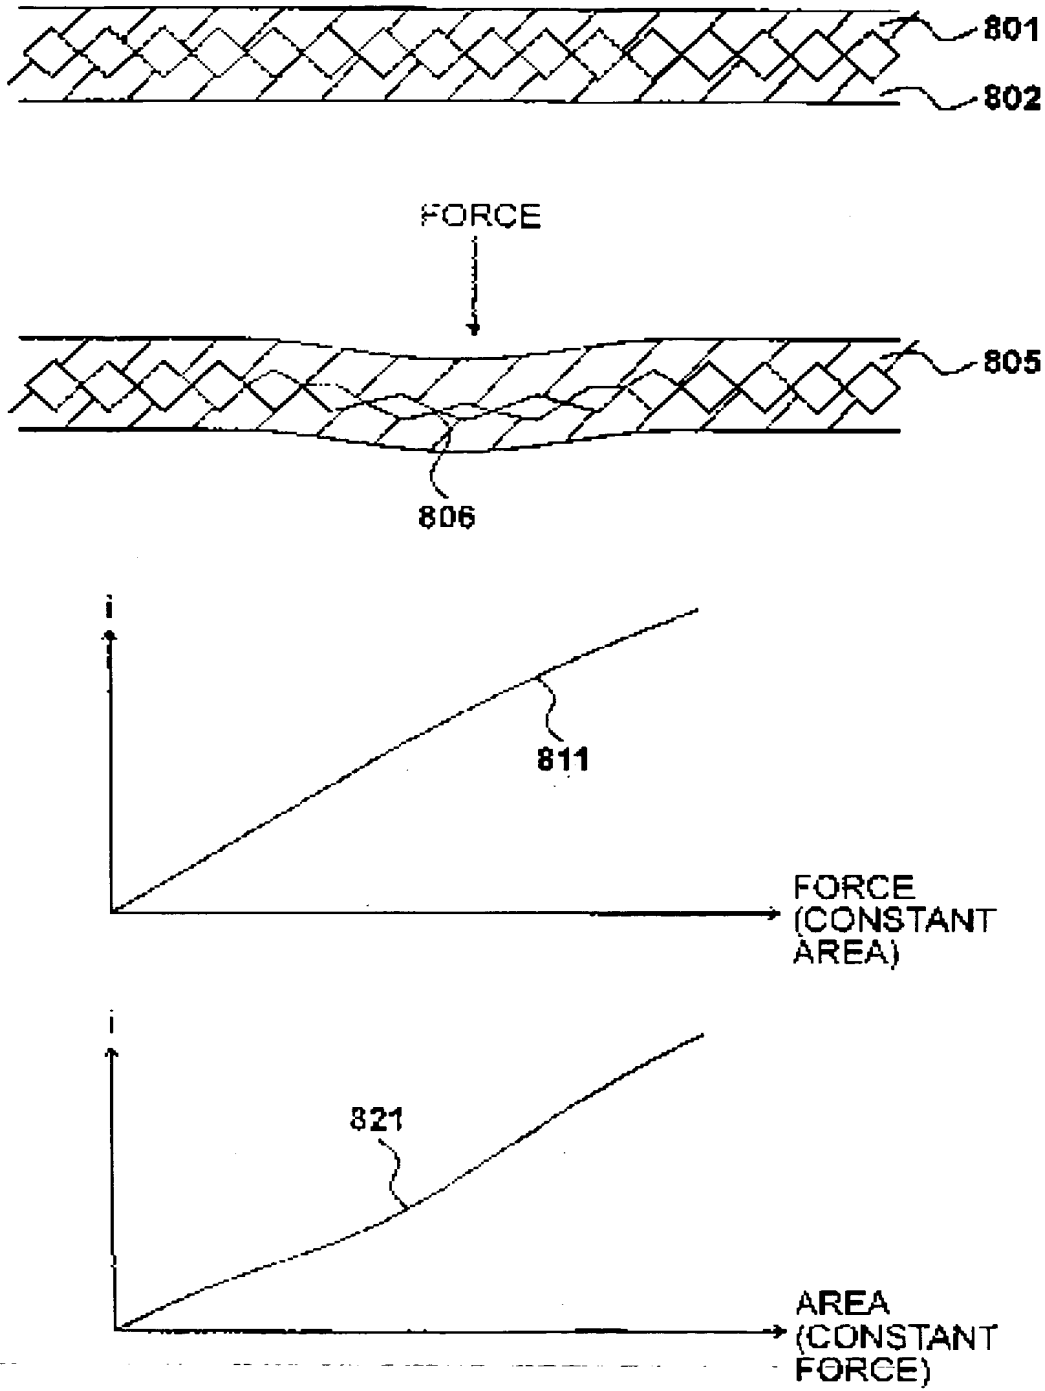


Figure 8

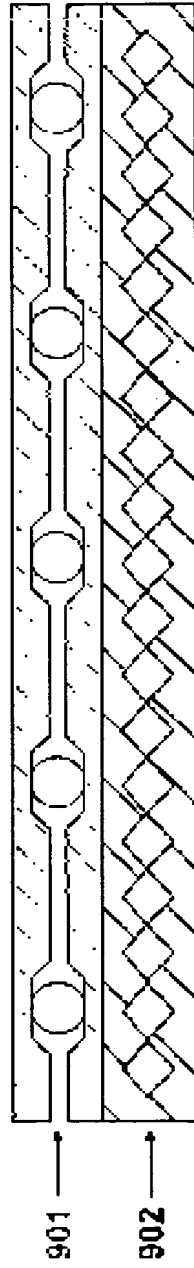


Figure 9

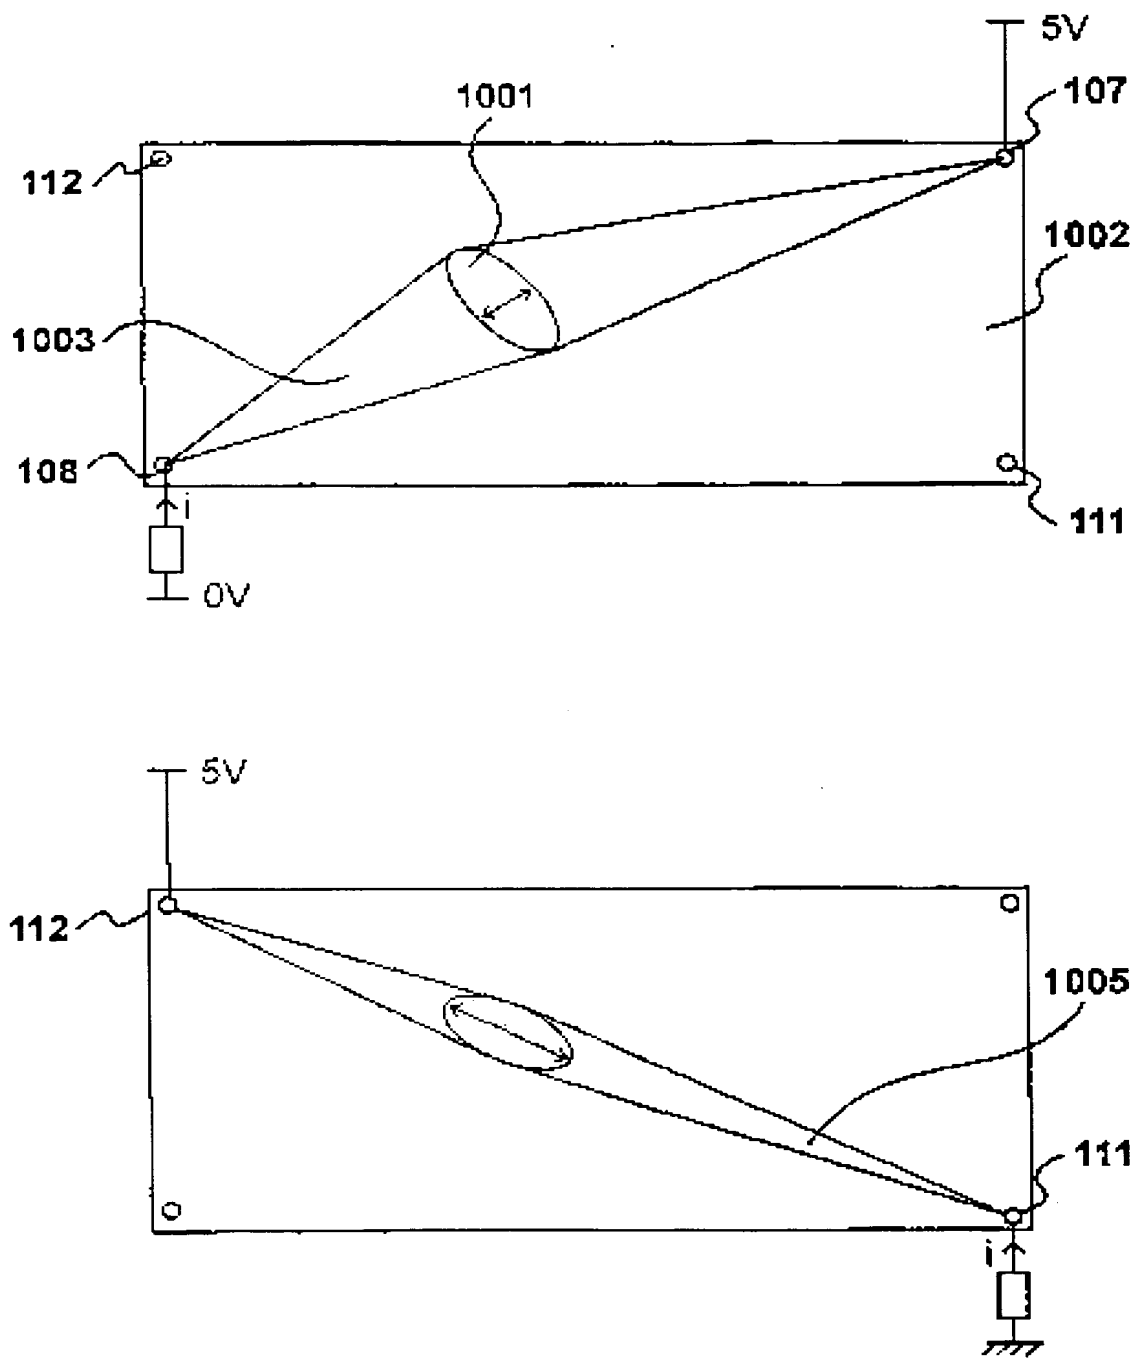


Figure 10

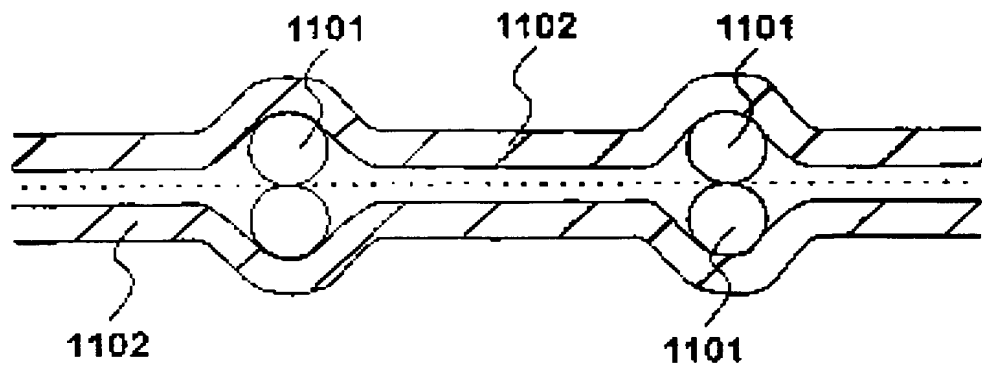


Figure 11A

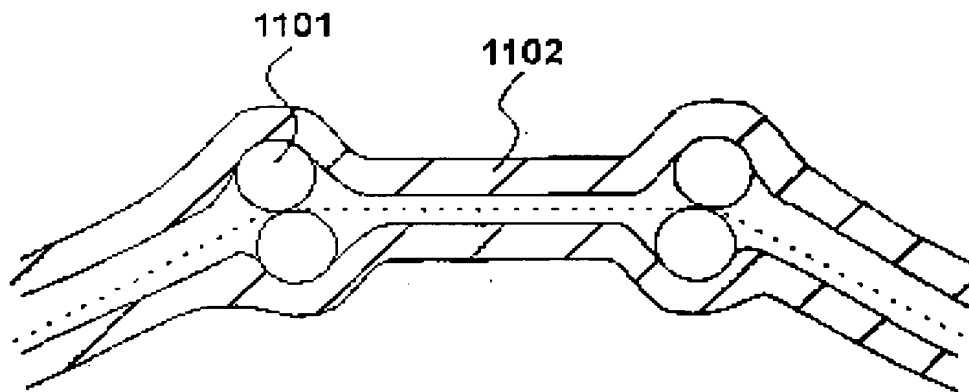


Figure 11B

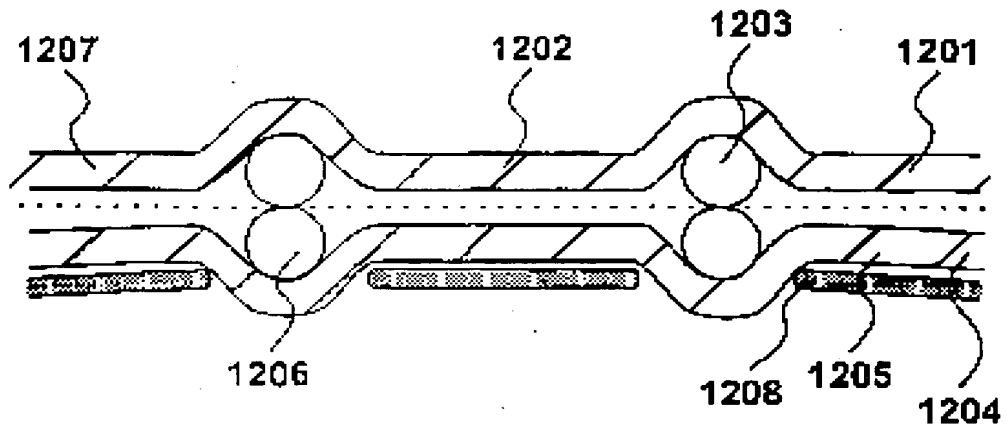


Figure 12A

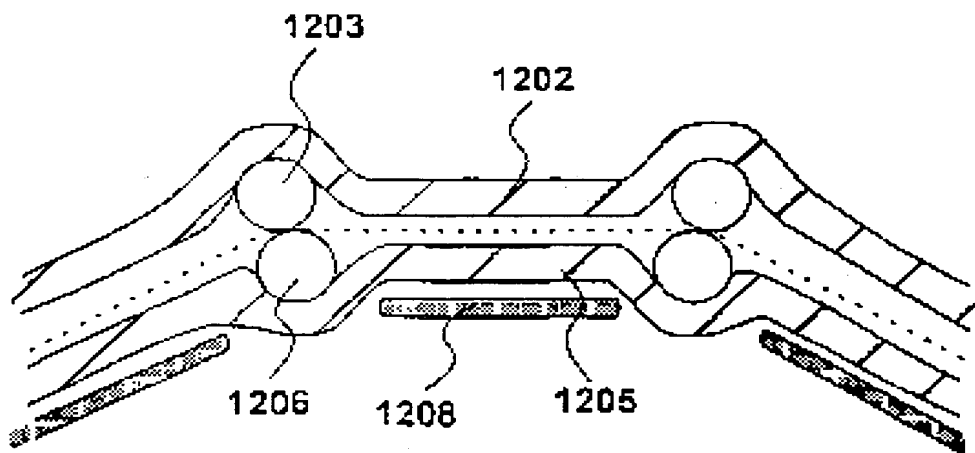


Figure 12B

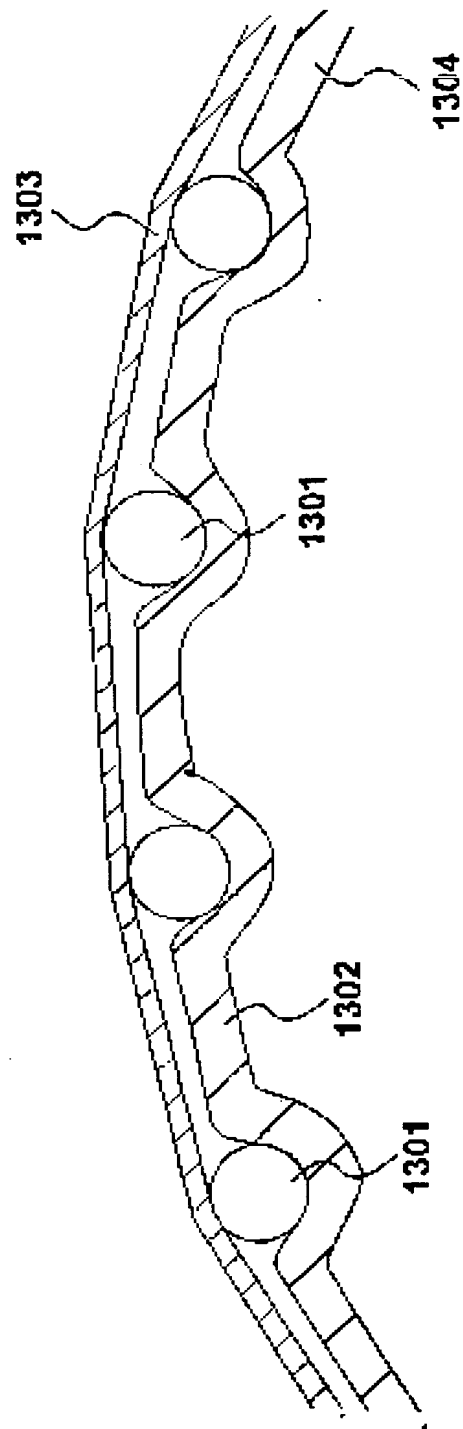


Figure 13

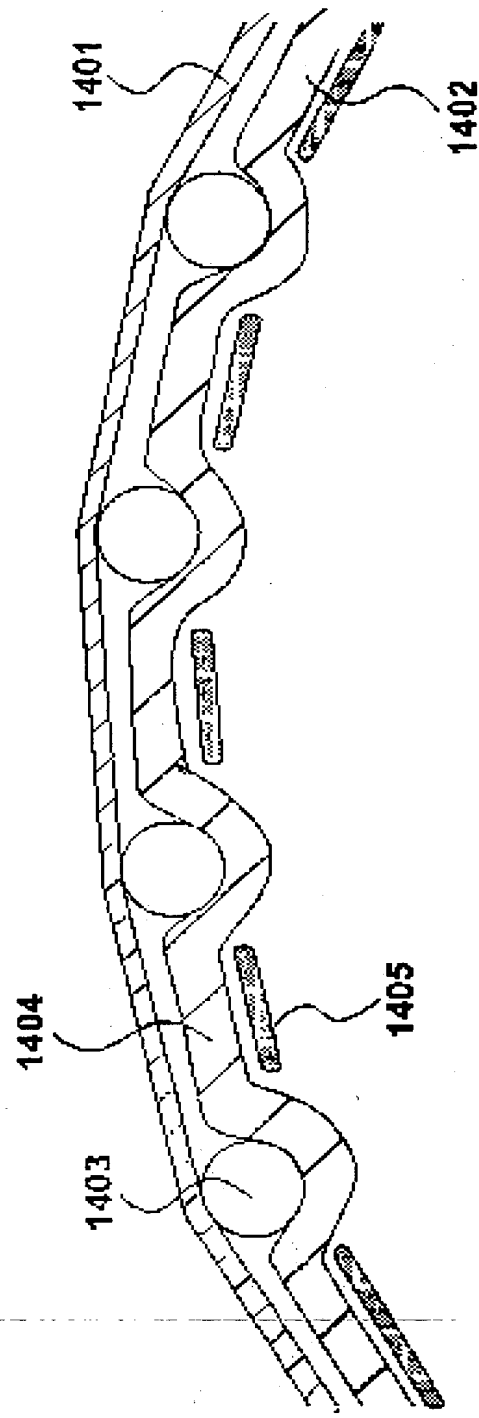


Figure 14

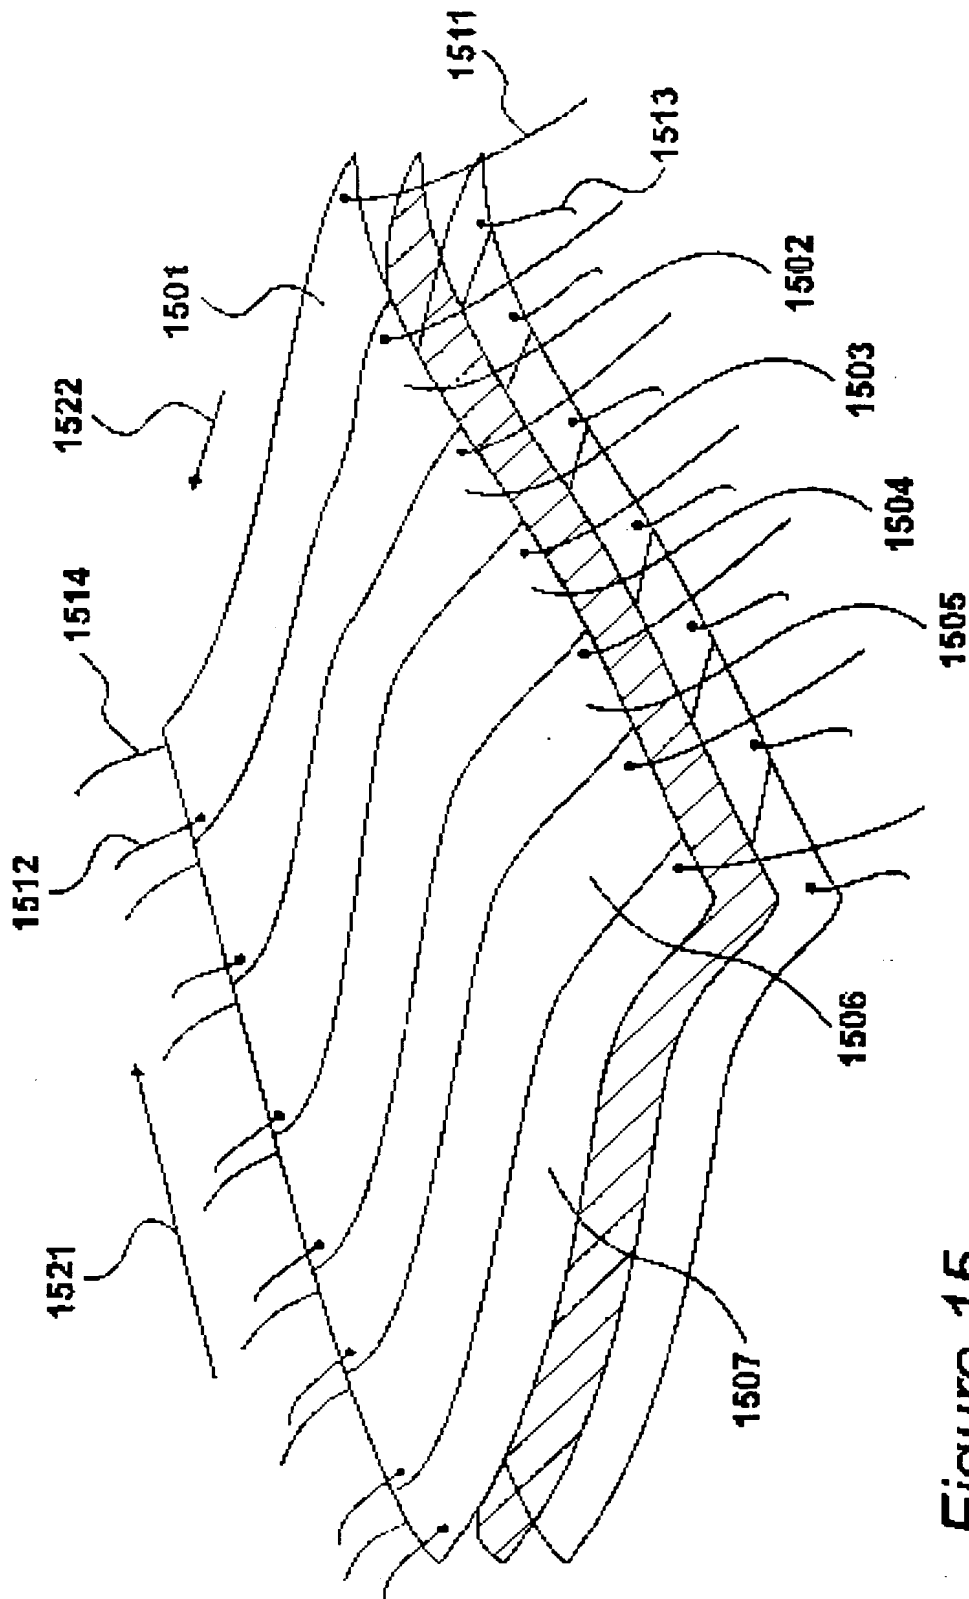


Figure 15

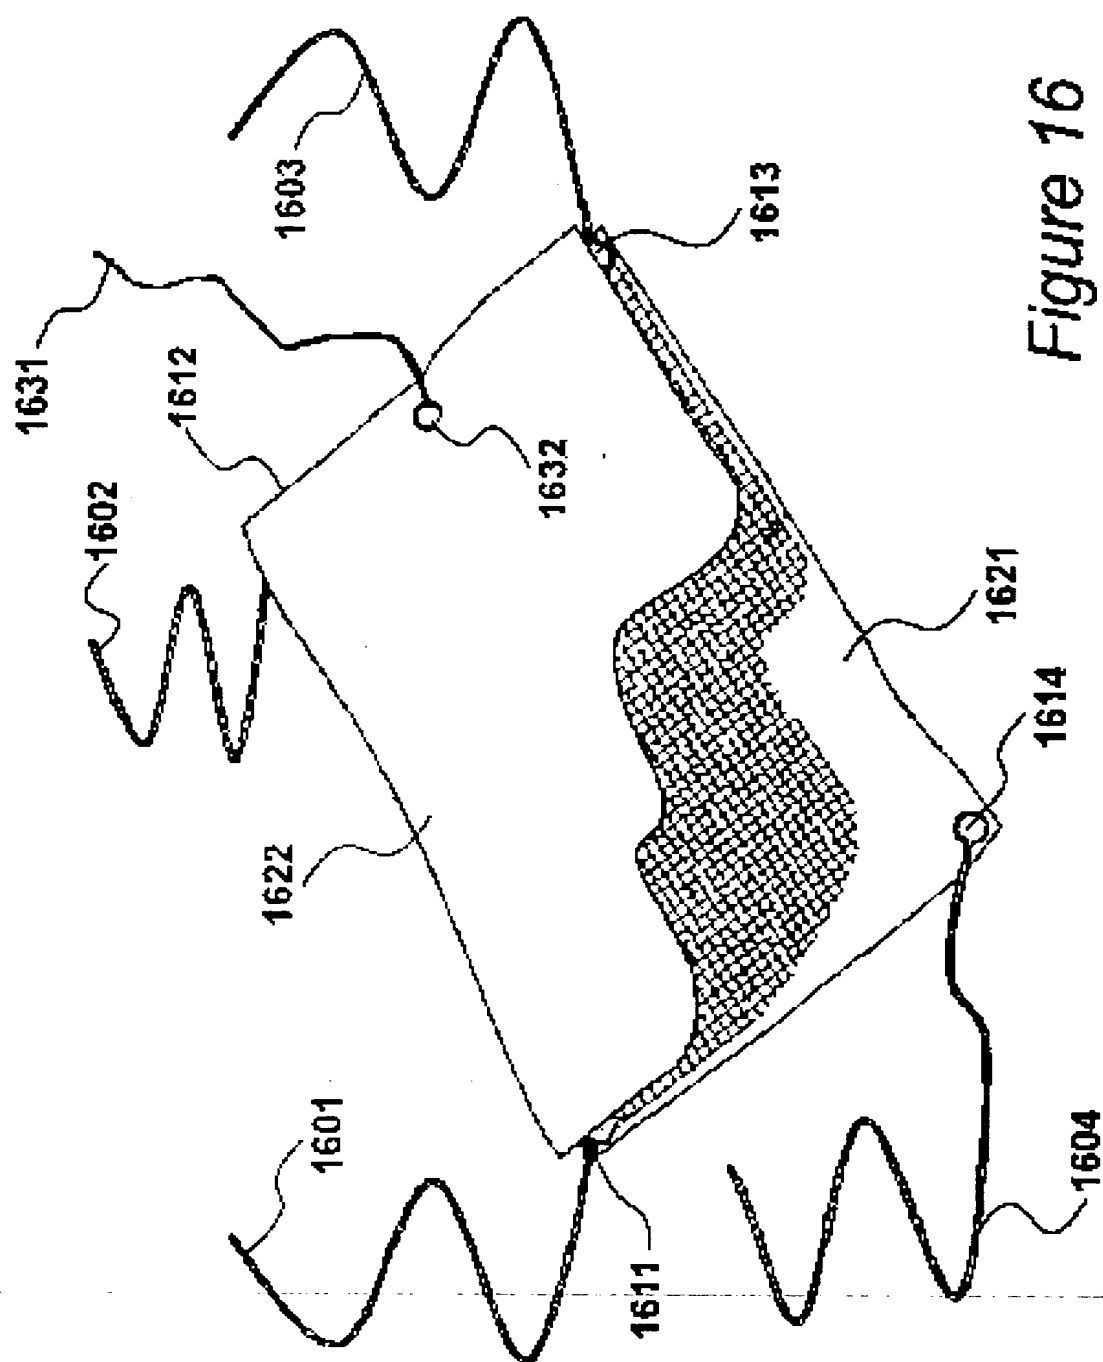


Figure 16

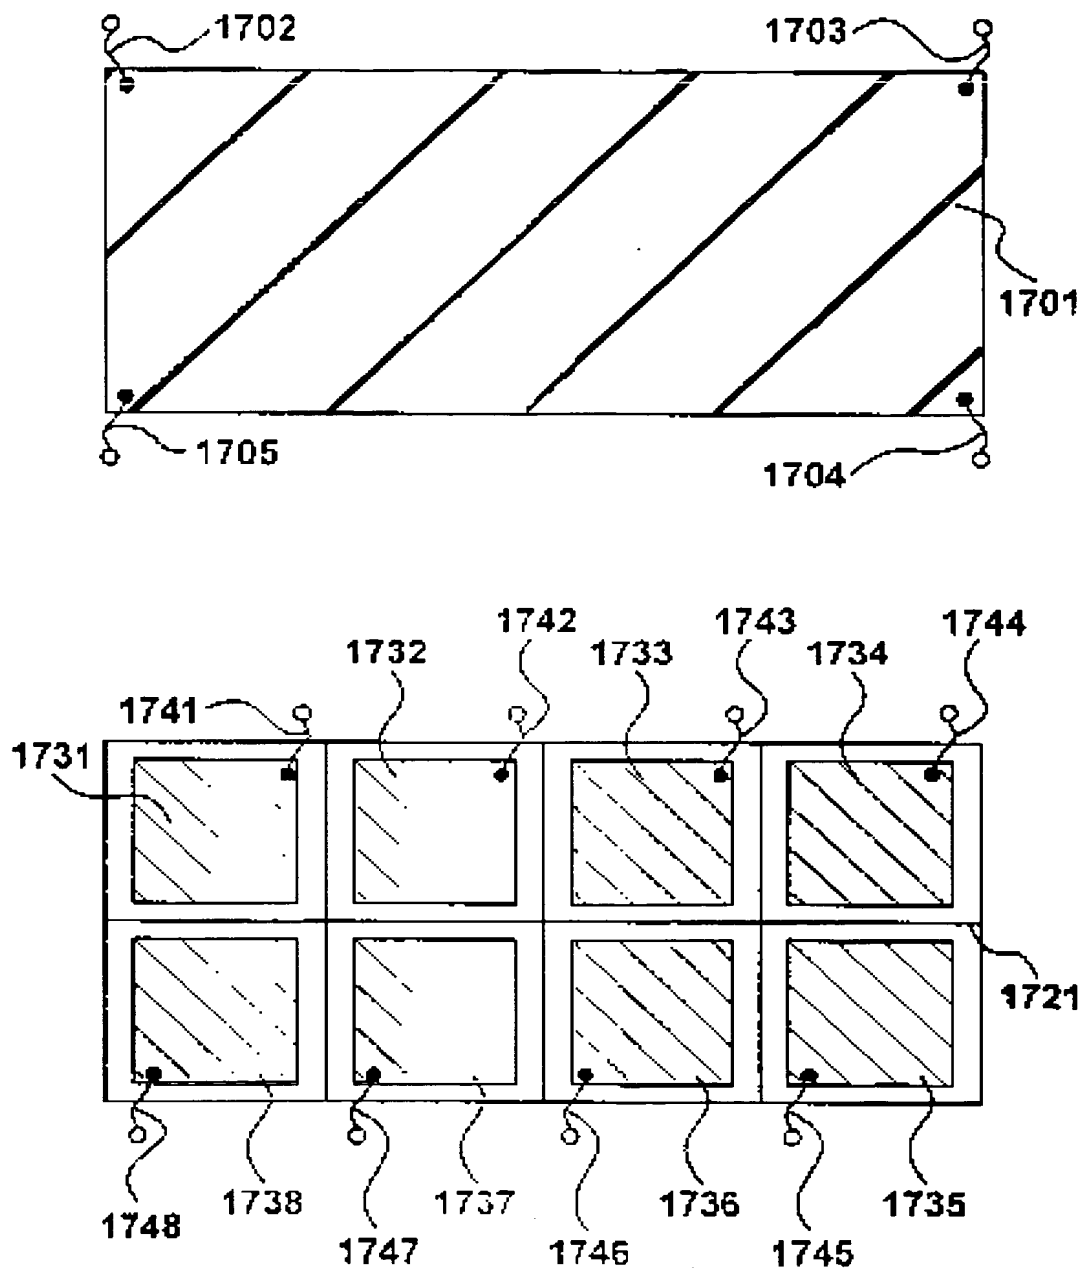


Figure 17

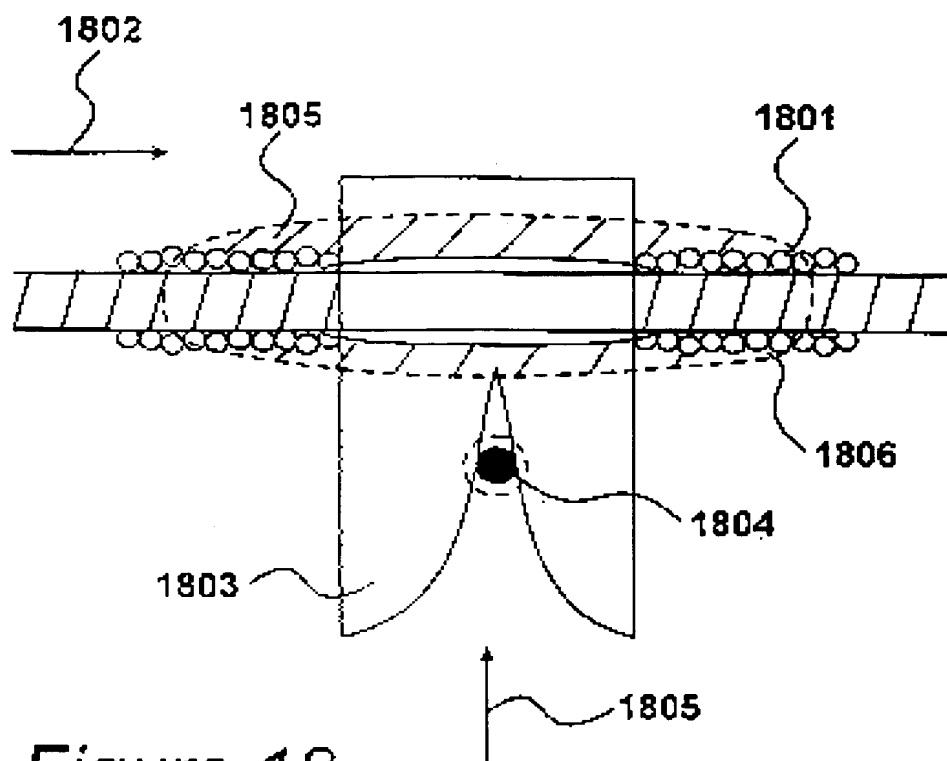


Figure 18

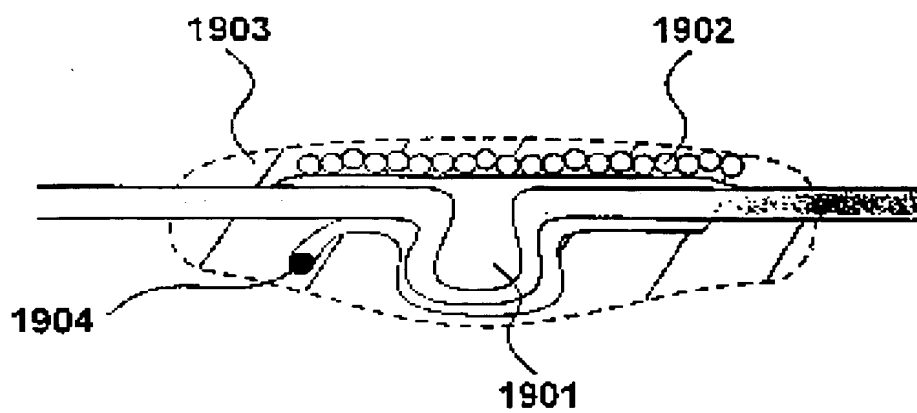


Figure 19

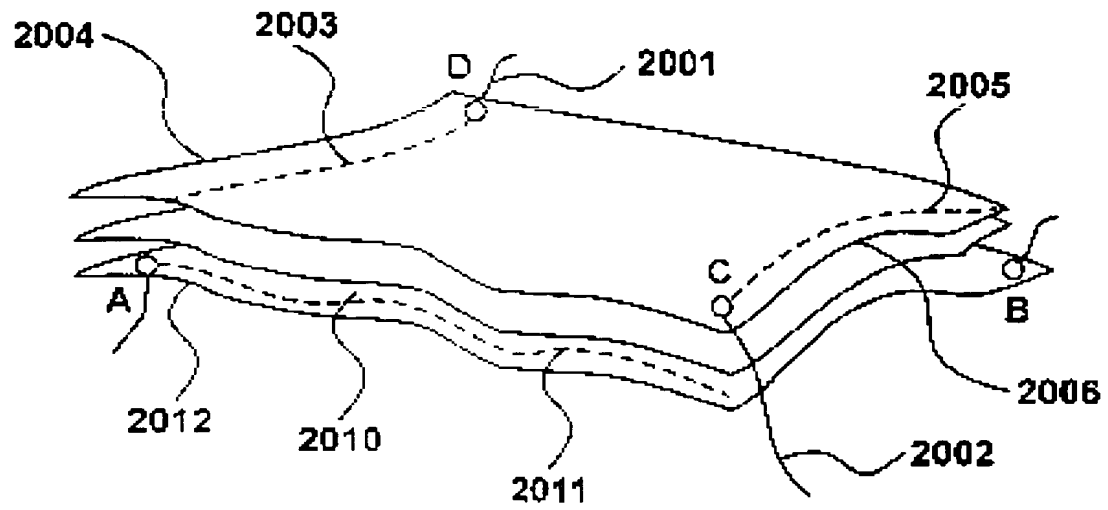


Figure 20


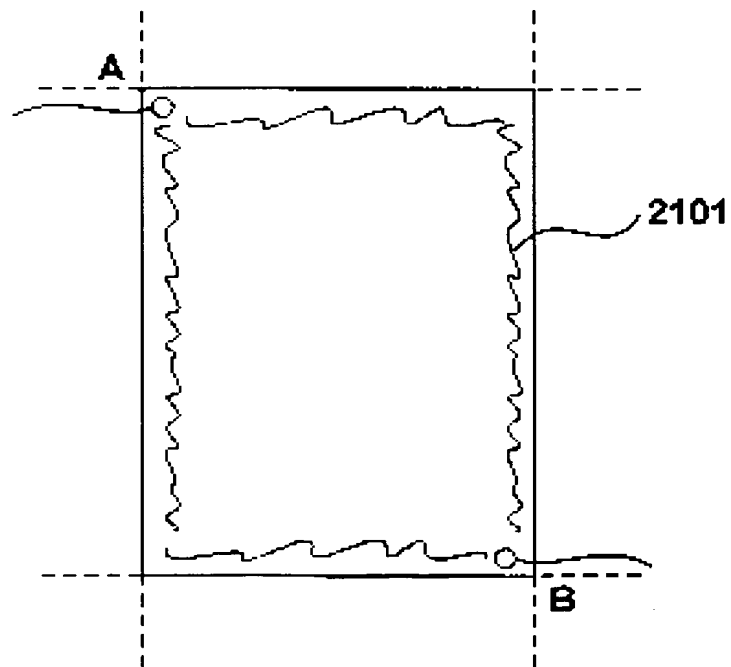


Figure 21

This Page Blank (uspto)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 989 509 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
21.03.2001 Bulletin 2001/12

(51) Int Cl.7: G06K 11/12, G01L 1/20

(43) Date of publication A2:
29.03.2000 Bulletin 2000/13

(21) Application number: 99307539.9

(22) Date of filing: 23.09.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **Electrotextiles Company Limited**
London WC1B 3ST (GB)

(72) Inventor: **Sandbach, David Lee**
London N7 8A7 (GB)

(30) Priority: 26.09.1998 GB 9820902
26.09.1998 GB 9820905
26.09.1998 GB 9820906
26.09.1998 GB 9820908
26.09.1998 GB 9820909
26.09.1998 GB 9820910

(74) Representative: **Atkinson, Ralph et al**
Atkinson Burrington
27-29 President Buildings
Firth Way
Sheffield S4 7UR (GB)

(54) **Position detector constructed from fabric**

(57) A position detector is constructed from fabric having electrically conductive elements. The detector has at least two electrically conducting planes. An electric potential is applied across one of the planes to de-

termine the position of a mechanical interaction. In addition, a second electrical property is determined to identify additional properties of the mechanical interactions.

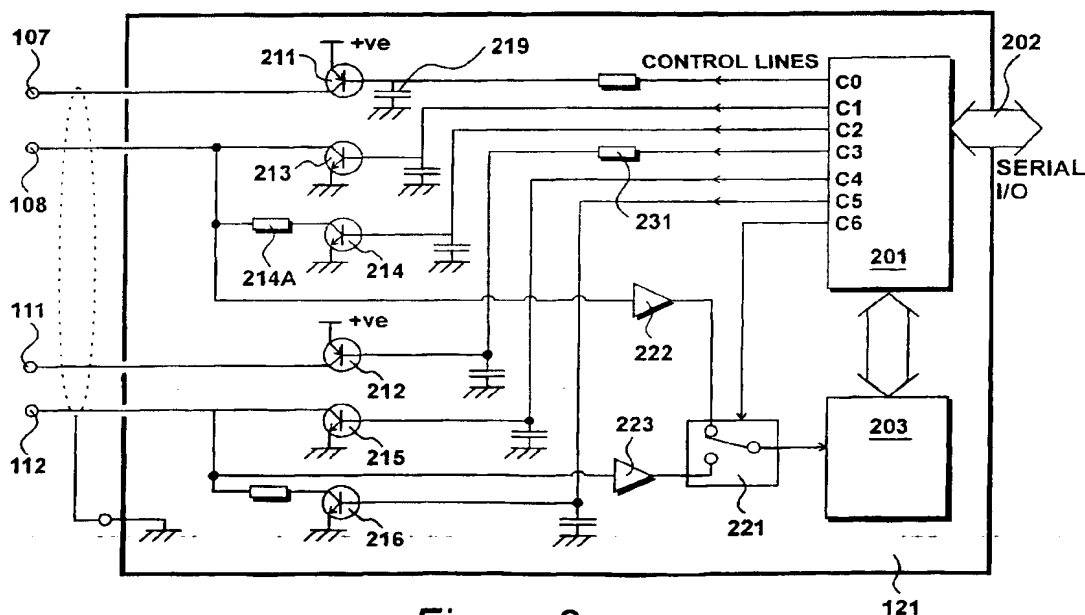


Figure 2



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 7539

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 4 795 998 A (DUNBAR JOHN H ET AL) 3 January 1989 (1989-01-03) * column 2, line 20 - column 3, line 21 * * column 7, line 3 - line 21 * * figures 1-10 *	1-9	G06K11/12 G01L1/20
X	US 5 060 527 A (BURGESS LESTER E) 29 October 1991 (1991-10-29) * column 2, line 13 - column 3, line 34 * * column 8, line 55 - column 9, line 11 * * figures 6-8 *	1-9	
A	PATENT ABSTRACTS OF JAPAN vol. 011, no. 068 (P-553), 28 February 1987 (1987-02-28) & JP 61 231626 A (ASAHI CHEM IND CO LTD), 15 October 1986 (1986-10-15) * abstract *	1,9	
X	US 4 659 873 A (GIBSON WILLIAM A ET AL) 21 April 1987 (1987-04-21) * abstract *	18-20,22	
A	* column 3, line 28 - line 56 * * column 8, last paragraph - column 9, paragraph 2 *	1,9,10, 14,17, 23-25,27	TECHNICAL FIELDS SEARCHED (Int.Cl.7) G06K G01L D03D
X	DE 21 48 190 A (REUTER MASCHINEN) 12 April 1973 (1973-04-12) * page 4, last paragraph - page 5, paragraph 1; figures 1,2 *	18-20	
A		22	
		-/--	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 19 January 2001	Examiner Ciarelli, N
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPC FORM 1503 03 82 (P04001)



European Patent
Office

Application Number
EP 99 30 7539

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 7539

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InCl.7)
X	PATENT ABSTRACTS OF JAPAN vol. 016, no. 052 (E-1164), 10 February 1992 (1992-02-10) & JP 03 254083 A (KATSUSATO FUJIYOSHI), 13 November 1991 (1991-11-13)	18-20	
A	* abstract *	22	
X	EP 0 855 307 A (SCHLEGEL SYSTEMS INC) 29 July 1998 (1998-07-29)	14, 17, 24-27	
A	* abstract * * column 4, line 5 - line 24; figures 1-8 *	10, 13	
A	US 4 810 992 A (EVENTOFF FRANKLIN N) 7 March 1989 (1989-03-07) * the whole document *	10, 13, 14, 17, 24	
A	EP 0 054 406 A (MOORE BUSINESS FORMS INC) 23 June 1982 (1982-06-23) * the whole document *	25-27	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	US 5 008 497 A (ASHER DAVID J) 16 April 1991 (1991-04-16) * the whole document *	25-27	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 19 January 2001	Examiner Ciarelli, N
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 02 82 (P4/C01)



European Patent
Office

LACK OF UNITY OF INVENTION
SHEET B

Application Number
EP 99 30 7539

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims: 1-9

A position detector constructed from fabric and corresponding method.

2. Claims: 10-17

A detector (and corresponding method) constructed from fabric having electrically conductive elements to define at least two electrically conductive planes wherein one of the planes includes first portions and second portions, the first portions having a higher resistance than the second portions.

3. Claims: 18-22

A fabric constructed from electrically conducting fibres and from electrically insulating fibres by a mechanical process and corresponding method.

4. Claims: 23-27

A detector (and corresponding method) constructed from fabric in which two electrically conducting planes are defined and in which either a conductivity non-uniformity is included in at least one of the planes so as to modify an electrical response to a mechanical interaction or an electrical characteristic of the second plane differs significantly in value from the value of the electrical characteristic of the first plane.

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 99 30 7539

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-01-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4795998 A	03-01-1989	AT 51447 T	15-04-1990
		CA 1260729 A	26-09-1989
		DE 3576850 D	03-05-1990
		EP 0161895 A	21-11-1985
		JP 61010734 A	18-01-1986
US 5060527 A	29-10-1991	NONE	
JP 61231626 A	15-10-1986	NONE	
US 4659873 A	21-04-1987	EP 0210063 A	28-01-1987
		JP 62063332 A	20-03-1987
DE 2148190 A	12-04-1973	NONE	
JP 03254083 A	13-11-1991	NONE	
EP 0855307 A	29-07-1998	US 5878620 A	09-03-1999
		AU 5269998 A	30-07-1998
		BR 9800294 A	06-07-1999
		CA 2225945 A	23-07-1998
		CN 1199164 A	18-11-1998
		JP 3017968 B	13-03-2000
		JP 10232176 A	02-09-1998
US 4810992 A	07-03-1989	US 4739299 A	19-04-1988
EP 0054406 A	23-06-1982	AT 13366 T	15-06-1985
		AU 7849281 A	24-06-1982
		BR 8108108 A	21-09-1982
		DE 3170550 D	20-06-1985
		DK 530781 A	16-06-1982
		ES 507882 D	16-01-1983
		ES 8400055 A	01-01-1984
		FI 813973 A	16-06-1982
		GR 76951 A	04-09-1984
		JP 1232363 C	26-09-1984
		JP 57146381 A	09-09-1982
		JP 59007992 B	22-02-1984
		NO 814016 A	16-06-1982
		PT 74026 A,B	01-12-1981
		ZA 8108186 A	24-11-1982
US 5008497 A	16-04-1991	AU 7573991 A	21-10-1991
		EP 0476099 A	25-03-1992
		WO 9115006 A	03-10-1991

EPO FORM P446

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82